


A rectangular stamp with a green border and a blue, bubbly background. The text "SAMPLE APPROVAL" is written in bold, dark blue capital letters. A faint "MUP" logo is visible in the background of the stamp.

SAMPLE APPROVAL

Model No.: MUP-C713

Revision: 1.0

Issue Date: Mar.10.2006

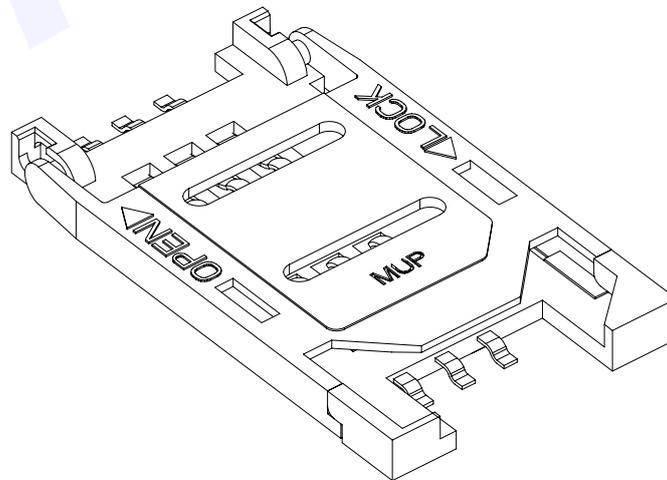

MUP INDUSTRIAL CO., LTD

LingWu Industrial Park, Junzibu, Guanlan Street, Baoan District Shenzhen,China

TEL: 0755-29673656/57/58

FAX: 0755-29673655

E-Mail: sales@mupconnector.com

URL: [Http:// www.mupconnector.com](http://www.mupconnector.com)

TABLE OF CONTENTS

1 INTRODUCTION

- 1.1 General
- 1.2 Features
- 1.3 Applications

2 TECHNICAL CHARACTERISTICS

- 2.1 General Characteristics
- 2.2 Electrical Characteristics
 - 2.2.1 Data contact
- 2.3 Mechanical Characteristics
- 2.4 Solder ability
- 2.5 Environmental Characteristics

3 INTERFACE

- 3.1 Signal Interface
- 3.2 SIM Card Contact Location(GSM11.11)

4 MECHANICAL OUTLINE DRAWING


5 PACKING INFORMATION

- 5.1 Tray package information
- 5.2 Tape carrier packing information

1. INTRODUCTION

1.1 General

The C713 is in strict accordance with GSM11.11 international recognized standard, It is designed for high performance and flexibility to give prospective customers a quick applications of the individual devices in their product series, other kinds of models are optional, You need is our goal.

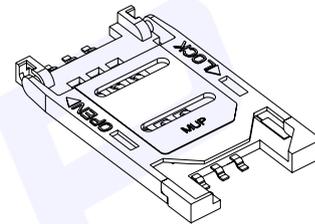

1.2 Features

- ◆ GAM11.11 Standard SIM Card
- ◆ Fast reaction capacity
- ◆ Broad application domain
- ◆ The superior performance
- ◆ Ideal stable performance

1.3 Applications

- ◆ Access Control Terminal
- ◆ Terminal identification module
- ◆ Telecommunication
- ◆ Handset
- ◆ Grasps pos machine
- ◆ Memory dense spoon management special-purpose
- ◆ Other Identification recognition

2. TECHNICAL CHARACTERISTIC

2.1 General Characteristics:

No.	Items	Standard	Descriptions
1	Dimensions		29.65LX17.20WX2.50H mm
2	Weight		Approx. 1.10±0.2g
3	Card size	GSM11.11	25.0×15.0×0.76mm
4	Contact principle		Friction technology
5	Mounting System		SMT(With Post)
6	Durability		5,000 cycles Min.
Material			
1	Insulator		Thermoplastic UL94V-0
2	Contact		Phosphor bronze
3	Plating		Gold over nickel

2.2 Electrical Characteristics: according to standard IEC512

2.2.1 Data Contact

No.	Items	Standard	Descriptions
1	Number of Contacts		6 Pins
2	Contact highly		0.95±0.20mm
3	Insulation resistance pin to pin	IEC512-2-3a	>1000 MΩ/500 VDC
4	Rated voltage		50V max
5	Rated current		1A max., 10μA min.
6	Contact resistance	IEC512-2-2a	50 mΩ typical, 100mΩ max.
7	Dielectric withstanding voltage	IEC512-2-4a	500V AC rms 1min.(sea level)

2.3 Mechanical Characteristics:

No.	Items	Standard	Descriptions
1	Contact force		$\geq 0.5N$
2	Contact location	GSM11.11	

2.4 Solder ability:

No.	Items	Standard	Descriptions
1	Wave	IEC-68-2-20	Not applicable.
2	Vapor phase		215°C, 30sec.Max
3	IR re-flow		250°C, 5 sec.Max
4	Manual	IEC-68-2-20	370°C, 3 sec.Max.

2.5 Environmental Characteristics

No.	Items	Standard	Descriptions
1	Operation temperature		-40°C ~ +85°C
2	Operating humidity		10% ~ 95%RH
3	Storage temperature		-40°C ~ +85°C,
4	Storage humidity		10% ~ 95%RH
5	Thermal shock	IEC68-2-14	-40°C ~ +85°C, 5 cycles
6	Damp heat	IEC68-2-3	40°C, 90%RH, 500HR.
7	Salt-mist	IEC68-2-11	35°C, 5% NaCl, 24HR


3. INTERFACE

3.1 Signal



Signal interface connections for C713 are shown below.

Contact No.	Assignment	Description	Remark
C1	Vcc	Power Voltage	
C2	RST	Reset Signal	
C3	CLK	Clock Signal	
C4	RFU	Reserve for future use	
C5	GND	Power and Signal Ground	
C6	Vpp	Programming Voltage	
C7	I / O	Serial Data input/ output	
C8	RFU	Reserve for future use	

3.2 SIM Card Contact Location(GSM11.11)

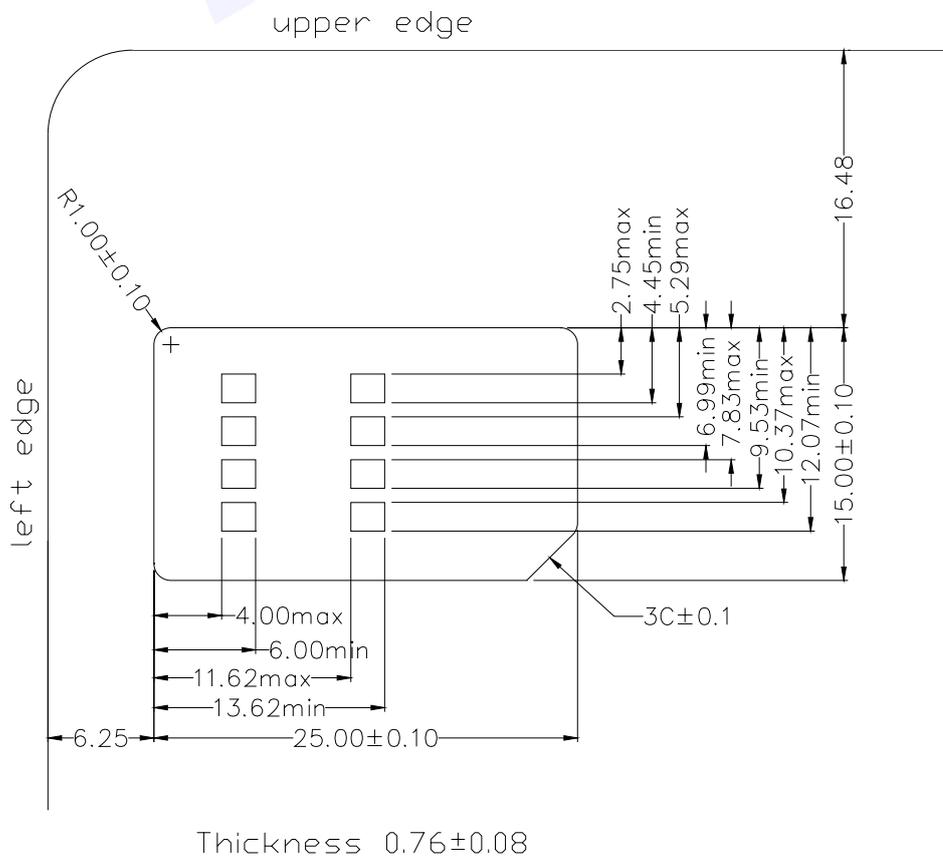

4. MECHANICAL OUTLINE DRAWING

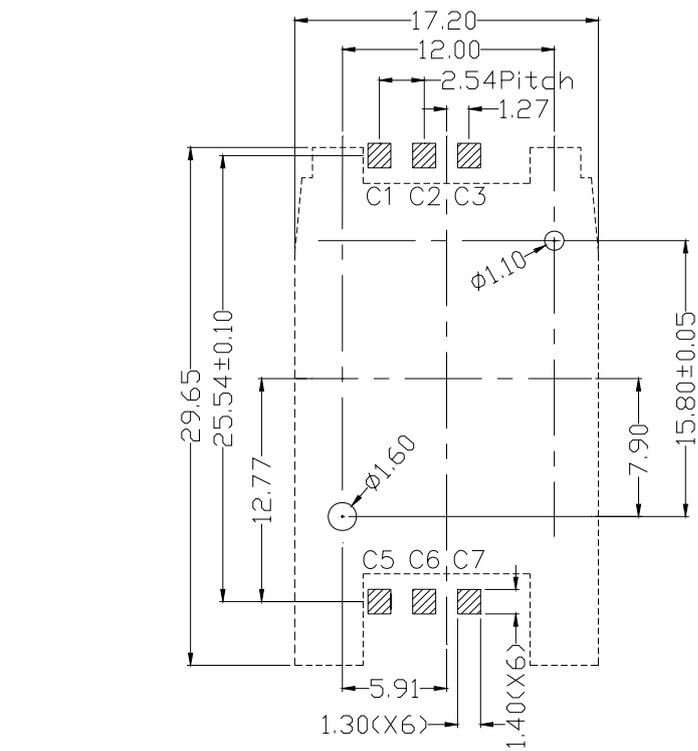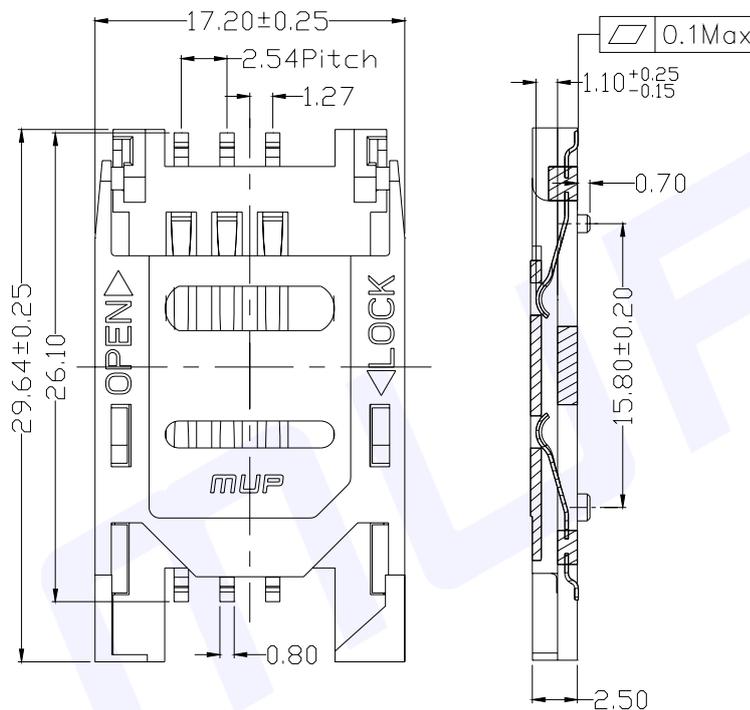


RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ±0.05)

5. PACKING INFORMATION

5.1 Tray package information

Q'ty: 60 pcs per tray

Meas: 30.0L×21.0W×0.90H cm

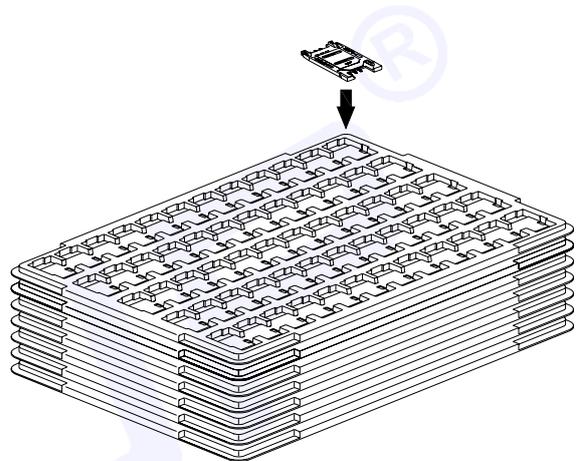


N.W.: 0.60 KG

G.W.: 0.70 KG

Q'ty: 360 pcs per box (6 trays set in order
plus one empty tray)

Meas: 31.50L×21.50W×4.00H cm

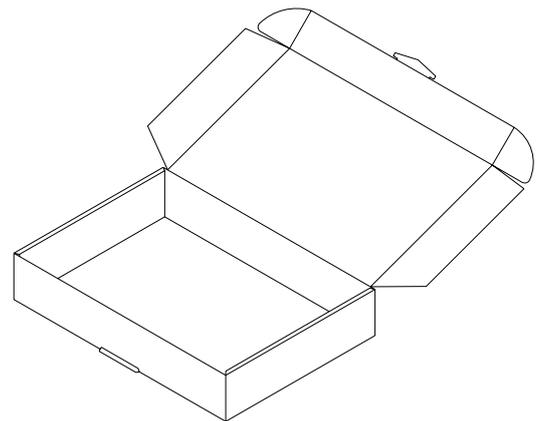


N.W.: 3.50 KG

G.W.: 4.00 KG


Q'ty: 1800 pcs per box (5 boxes set in order)

Meas: 33.30L×23.30W×23.00H cm

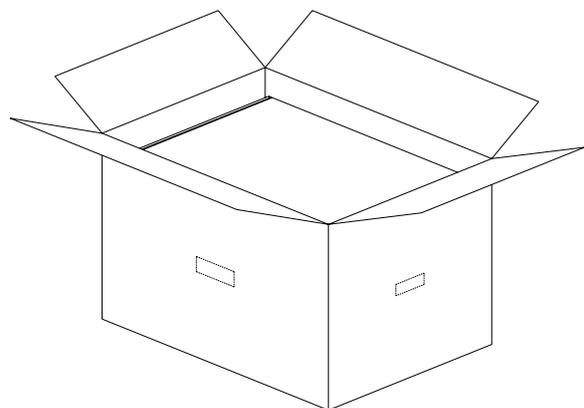


5.2 Tape carrier packing information

5.2.1 Carrier Dimensions Diagram

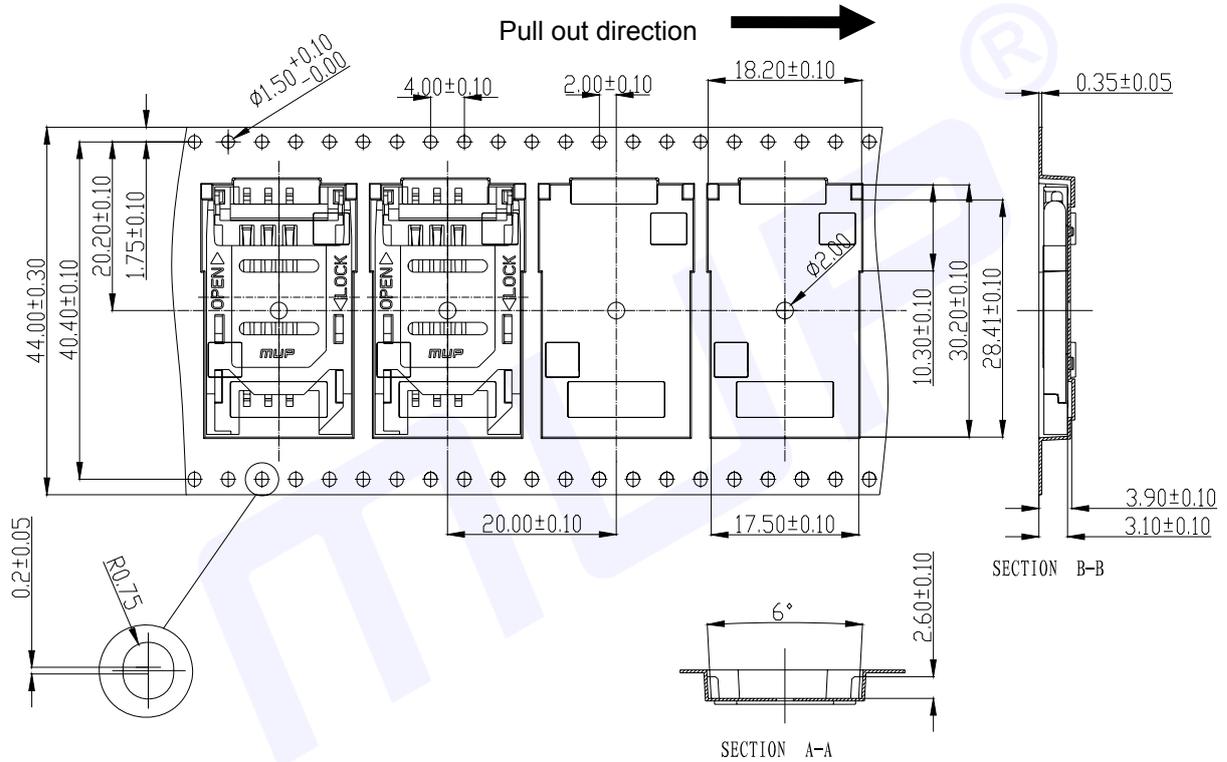

5.2.2 Reel Form Diagram

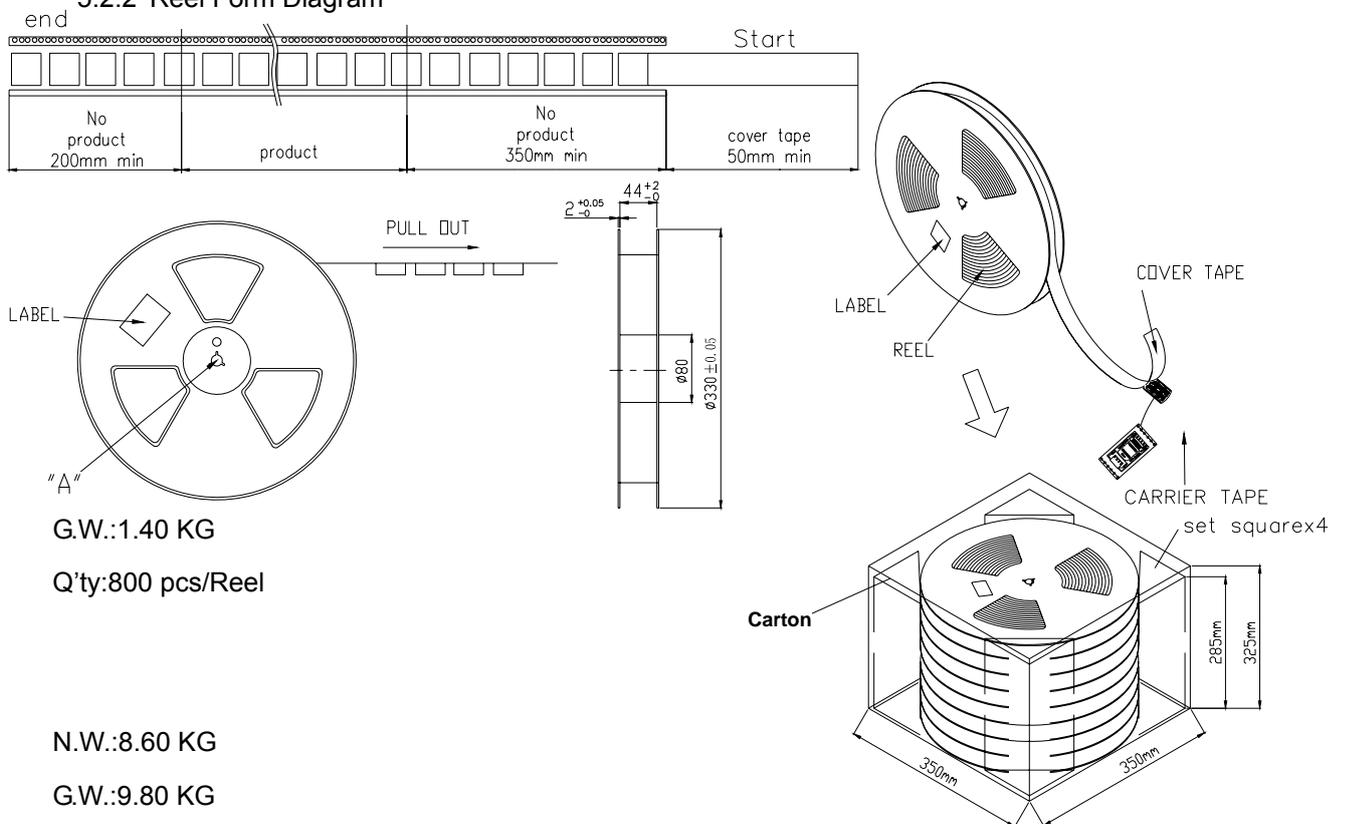

G.W.:1.40 KG

Q'ty:800 pcs/Reel

N.W.:8.60 KG

G.W.:9.80 KG

Q'ty: 4800 pcs per Carton (6 Reel set in order)

Meas: 35.00L×35.00W×31.50H cm