

Features

- Wide operating voltage: 1.4V to 5.5V
- Low quiescent current: typical 0.6μA/amplifier
- Rail-to-Rail output
- Gain bandwidth: 11kHz typical
- Unity gain stable
- Available in Single, Dual and Quad OP's package types
- Package type:
 - ◆ HT9291: SOT23-5
 - ◆ HT9292: 8-pin DIP/SOP
 - ◆ HT9294: 14-pin DIP/SOP

General Description

The Holtek HT9291/HT9292/HT9294 range of Low Power Operation Amplifiers offer the advantage of a single supply voltage down to as low as 1.4V as well as the advantages of an extremely low quiescent current of only 0.6μA/amplifier. One other major advantage of these devices lie in their rail-to-rail voltage operation for maximum range. The devices also provide a typical gain bandwidth product of 11kHz and are also unity gain stable. The devices are available in a range of packages according to the number of internal amplifiers. The special characteristics of these devices will ensure their excellent use in applications with stringent low power demands such as portable products, battery powered equipment, low power sensor signal processing etc.


Applications

- Wearable products
- Temperature measurement
- Battery powered products
- Portable equipment
- Low power sensors


Selection Table

| Part No. | Amplifiers | Package |
|----------|------------|-----------|
| HT9291 | 1 | SOT23-5 |
| HT9292 | 2 | 8DIP/SOP |
| HT9294 | 4 | 14DIP/SOP |

Block Diagram

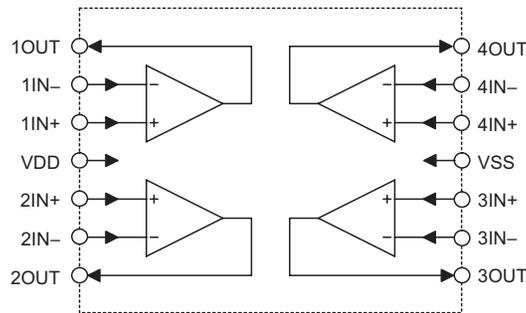

Pin Assignment

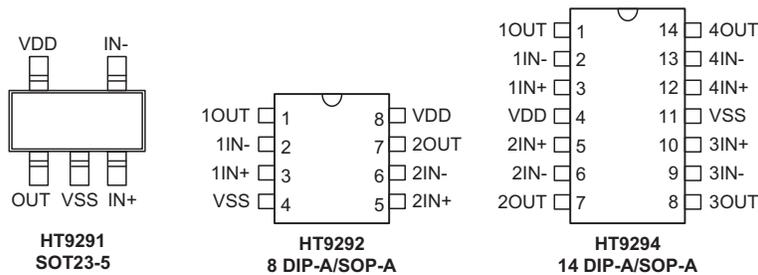

Pin Descriptions

HT9291

| Pin No. | Pin Name | Description |
|---------|----------|-----------------------|
| 1 | OUT | Analog output |
| 2 | VSS | Negative power supply |
| 3 | IN+ | Non-inverting input |
| 4 | IN- | Inverting input |
| 5 | VDD | Positive power supply |

HT9292

| Pin No. | Pin Name | Description |
|---------|----------|---|
| 1 | 1OUT | Analog output (operation amplifier 1) |
| 2 | 1IN- | Inverting input (operation amplifier 1) |
| 3 | 1IN+ | Non-inverting input (operation amplifier 1) |
| 4 | VSS | Negative power supply |
| 5 | 2IN+ | Non-inverting input (operation amplifier 2) |
| 6 | 2IN- | Inverting input (operation amplifier 2) |
| 7 | 2OUT | Analog output (operation amplifier 2) |
| 8 | VDD | Positive power supply |

HT9294

| Pin No. | Pin Name | Description |
|---------|----------|---|
| 1 | 1OUT | Analog output (operation amplifier 1) |
| 2 | 1IN- | Inverting input (operation amplifier 1) |
| 3 | 1IN+ | Non-inverting input (operation amplifier 1) |
| 4 | VDD | Positive power supply |
| 5 | 2IN+ | Non-inverting input (operation amplifier 2) |
| 6 | 2IN- | Inverting input (operation amplifier 2) |
| 7 | 2OUT | Analog output (operation amplifier 2) |
| 8 | 3OUT | Analog output (operation amplifier 3) |
| 9 | 3IN- | Inverting input (operation amplifier 3) |
| 10 | 3IN+ | Non-inverting input (operation amplifier 3) |
| 11 | VSS | Negative power supply |
| 12 | 4IN+ | Non-inverting input (operation amplifier 4) |
| 13 | 4IN- | Inverting input (operation amplifier 4) |
| 14 | 4OUT | Analog output (operation amplifier 4) |

Absolute Maximum Ratings

| | | | |
|--------------------------------|-----------------------------------|---|---------------------------------|
| Supply Voltage | 6.0V | Input Voltage | $V_{SS}-0.3V \sim V_{DD}+0.3V$ |
| Difference Input Voltage | $\pm(V_{DD}-V_{SS})$ | ESD protection on all pins (HBM;MM) ... | $\geq 4kV$; 400V |
| Storage Temperature | $-65^{\circ}C$ to $+150^{\circ}C$ | Operating Temperature | $-40^{\circ}C$ to $85^{\circ}C$ |
| Junction Temperature | $150^{\circ}C$ | | |

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

Electrical Characteristics


Unless otherwise indicated, $V_{SS}=GND$, $T_a=25^{\circ}C$, $V_{CM}=V_{DD}/2$, $V_L=V_{DD}/2$, and $R_L=1M\Omega$ to V_L , $C_L=60pF$

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|--------------------------|-------------------------------------|-----------------|---|-------------|----------|--------------|-------------------|
| | | V_{DD} | Conditions | | | | |
| V_{DD} | Supply Voltage | — | — | 1.4 | — | 5.5 | V |
| V_{OS} | Input Offset Voltage | 5V | $V_{IN}=V_{CM}/2$ | -5.0 | — | 5.0 | mV |
| $\Delta V_{OS}/\Delta T$ | Drift with Temperature | 5V | $V_{IN}=V_{CM}/2$ | — | ± 2 | — | $\mu V/^{\circ}C$ |
| I_{OS} | Input Offset Current | 5V | $T_a=25^{\circ}C$ | — | ± 5 | — | pA |
| I_B | Input Bias Current | 5V | $T_a=25^{\circ}C$ | — | ± 50 | — | pA |
| V_{CM} | Input Common Mode Range | 5V | — | 0 | — | $V_{DD}-1.2$ | V |
| V_{OH} | Maximum Output Voltage Swing | 5V | 0.5V input overdrive $R_L=1M\Omega$ to V_L | $V_{SS}+10$ | — | $V_{DD}-10$ | mV |
| V_{OL} | Maximum Output Voltage Swing | 5V | 0.5V input overdrive $R_L=50k\Omega$ to V_L | $V_{SS}+20$ | — | $V_{DD}-50$ | mV |
| A_{OL} | DC Open-Loop Gain (large signal) | 5V | $V_{OUT}=0.2V$ to $V_{DD}-0.2V$, $V_{IN}=V_{CM}/2$ | 70 | 100 | — | dB |
| GBW | Gain BandWidth Product | 5V | $R_L=1M\Omega$, $C_L=60pF$, $V_{IN}=V_{CM}/2$ | — | 11 | — | kHz |
| Φ_m | Phase Margin | 5V | $R_L=1M\Omega$, $C_L=60pF$ $G=+1V/V$, $V_{IN+}=V_{DD}/2$ | — | 50 | — | $^{\circ}$ |
| CMRR | Common Mode Rejection Ratio | 5V | $V_{CM}=0V$ to $V_{DD}-1.4V$ | 60 | 90 | — | dB |
| PSRR | Power Supply Rejection Ratio | 5V | $V_{CM}=0.2V$ | 65 | 95 | — | dB |
| I_{CC} | Supply Current Per Single Amplifier | 5V | $I_O=0A$ for HT9291 | 0.50 | 0.80 | 1.20 | μA |
| | | | $I_O=0A$ for HT9292/HT9294 | 0.30 | 0.60 | 1.00 | μA |
| SR | Slew Rate at Unity Gain | 5V | $R_L=1M\Omega$, $C_L=60pF$ | — | 5 | — | V/ms |
| I_{O_SOURCE} | Output Short Circuit Source Current | 5V | $V_{IN+} - V_{IN-} \geq 10mV$ | -0.3 | -1.2 | — | mA |
| I_{O_SINK} | Output Short Circuit Sink Current | 5V | $V_{IN-} - V_{IN+} \geq 10mV$ | 1 | 4 | — | mA |

Functional Description

Input Stage

The input stage of op amps are nominal PMOS differential amplifiers (see the following diagram), therefore the common mode input voltage can extend to $V_{SS}-0.6V$. On the other hand the common mode input voltage has to be maintained below $(V_{DD}-1.2V)$ to keep the input device (M2 and M3) active. This implies that when using HT9291/HT9292/HT9294 as a voltage follower, the input as well as output active range will be limited between $V_{SS}\sim V_{DD}-1V$ (approx.). Avoid applying any voltage greater than $V_{DD}+0.6V$ or less than $V_{SS}-0.6V$ to the input pins, otherwise the internal input protection devices may be damaged.

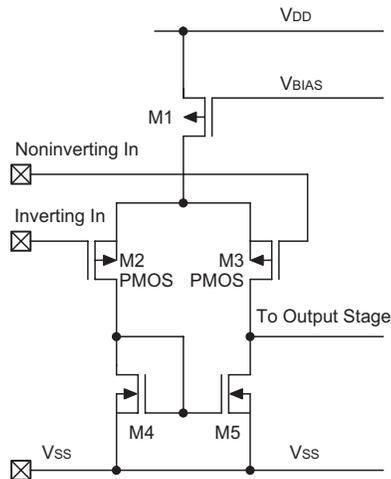


Since the input impedance of PMOS is inherently very high, it can directly couple to high impedance elements without loading effect. For example, coupling to ceramic transducers, integrating capacitor and resistor networks.

Actually the extremely high input impedance is its major advantage over the bipolar counterpart, in some application fields such as integrators where the input current of op amp can cause significant error.

Output Stage

The HT9291/HT9292/HT9294 uses push-pull CMOS configuration as the output stage of op amps to minimize low power consumption and to provide adequate output driving current.

Note that the output is an unbuffered structure, therefore the open loop gain will be affected by the load resistor since the voltage gain of this stage can be expressed as $(gm_5 + gm_6) \times R_L$.

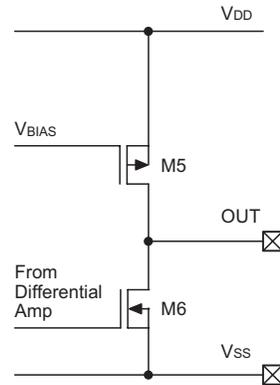


Because of the consideration for minimized power consumption, the output short circuit current is limited to about $-1.2mA$ for source drive and $4mA$ for sink drive. This is believed to be enough for most low power systems, however it is recommended to use the load resistor of $>1M\Omega$ for normal applications. In case of heavy load driving, an external buffer stage using bipolar transistors is recommended.


The HT9291/HT9292/HT9294 is internally compensated for AC stability and capable to withstand up to a $60pF$ capacitive load.

Application Circuits

High Side Battery Current Sensor

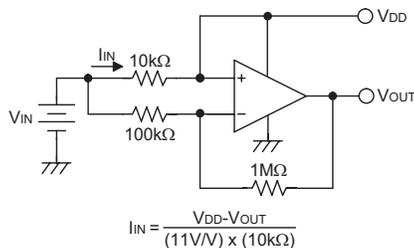

Two Op Amp Instrumentation Amplifier

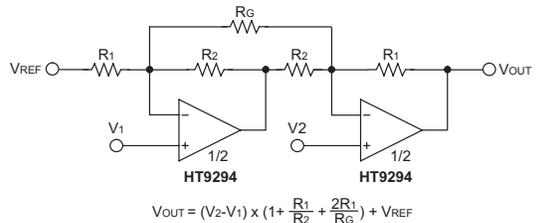


Package Information

Note that the package information provided here is for consultation purposes only. As this information may be updated at regular intervals users are reminded to consult the [Holtek website](#) for the latest version of the package information.


Additional supplementary information with regard to packaging is listed below. Click on the relevant section to be transferred to the relevant website page.

- [Further Package Information](#) (include Outline Dimensions, Product Tape and Reel Specifications)
- [Packing Materials Information](#)
- [Carton information](#)
- [PB FREE Products](#)
- [Green Packages Products](#)

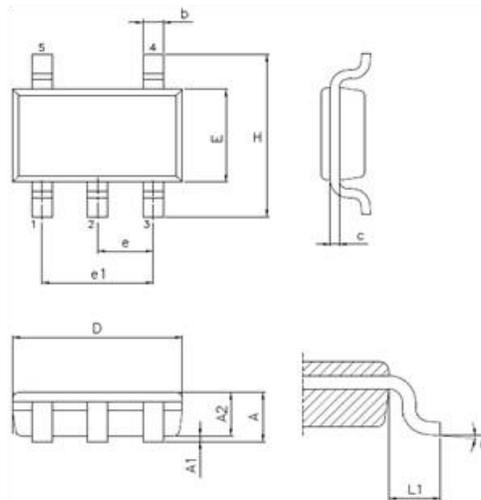5-pin SOT23-5 Outline Dimensions


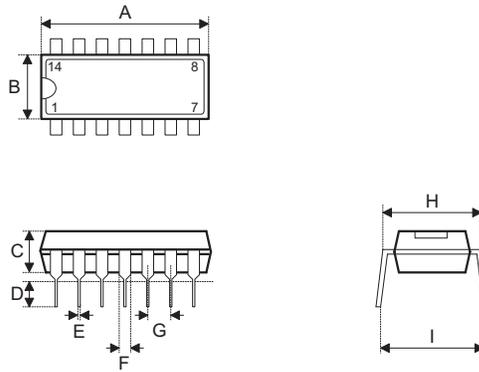
| Symbol | Dimensions in inch | | |
|--------|--------------------|-----------|-------|
| | Min. | Nom. | Max. |
| A | 0.030 | — | 0.031 |
| A1 | 0.000 | — | 0.002 |
| A2 | 0.028 | 0.030 | 0.031 |
| b | 0.014 | — | 0.020 |
| C | 0.004 | — | 0.008 |
| D | — | 0.114 BSC | — |
| E | — | 0.110 BSC | — |
| E1 | — | 0.063 BSC | — |
| e | — | 0.037 BSC | — |
| e1 | — | 0.075 BSC | — |
| L | 0.015 | 0.018 | 0.024 |
| L1 | — | 0.024 BSC | — |
| θ | 0° | — | 8° |

| Symbol | Dimensions in mm | | |
|--------|------------------|----------|------|
| | Min. | Nom. | Max. |
| A | 0.75 | — | 0.80 |
| A1 | 0.00 | — | 0.05 |
| A2 | 0.70 | 0.75 | 0.78 |
| b | 0.35 | — | 0.50 |
| C | 0.10 | — | 0.20 |
| D | — | 2.90 BSC | — |
| E | — | 2.80 BSC | — |
| E1 | — | 1.60 BSC | — |
| e | — | 0.95 BSC | — |
| e1 | — | 1.90 BSC | — |
| L | 0.37 | 0.45 | 0.60 |
| L1 | — | 0.60 BSC | — |
| θ | 0° | — | 8° |

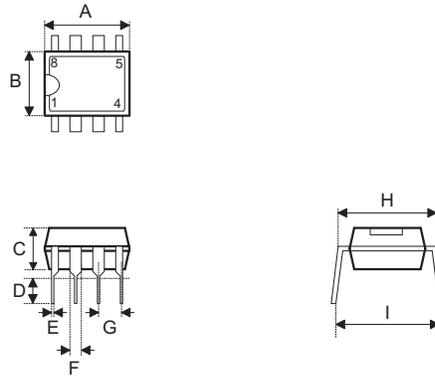8-pin DIP (300mil) Outline Dimensions


| Symbol | Dimensions in inch | | |
|--------|--------------------|-----------|-------|
| | Min. | Nom. | Max. |
| A | 0.355 | 0.365 | 0.400 |
| B | 0.240 | 0.250 | 0.280 |
| C | 0.115 | 0.130 | 0.195 |
| D | 0.115 | 0.130 | 0.150 |
| E | 0.014 | 0.018 | 0.022 |
| F | 0.045 | 0.060 | 0.070 |
| G | — | 0.100 BSC | — |
| H | 0.300 | 0.310 | 0.325 |
| I | — | — | 0.430 |


| Symbol | Dimensions in mm | | |
|--------|------------------|----------|-------|
| | Min. | Nom. | Max. |
| A | 9.02 | 9.27 | 10.16 |
| B | 6.10 | 6.35 | 7.11 |
| C | 2.92 | 3.30 | 4.95 |
| D | 2.92 | 3.30 | 3.81 |
| E | 0.36 | 0.46 | 0.56 |
| F | 1.14 | 1.52 | 1.78 |
| G | — | 2.54 BSC | — |
| H | 7.26 | 7.87 | 8.26 |
| I | — | — | 10.92 |

14-pin DIP (300mil) Outline Dimensions


| Symbol | Dimensions in inch | | |
|--------|--------------------|----------|-------|
| | Min. | Nom. | Max. |
| A | 0.735 | 0.750 | 0.775 |
| B | 0.240 | 0.250 | 0.280 |
| C | 0.115 | 0.130 | 0.195 |
| D | 0.115 | 0.130 | 0.150 |
| E | 0.014 | 0.018 | 0.022 |
| F | 0.045 | 0.060 | 0.070 |
| G | — | 0.10 BSC | — |
| H | 0.300 | 0.310 | 0.325 |
| I | — | — | 0.430 |


| Symbol | Dimensions in mm | | |
|--------|------------------|----------|-------|
| | Min. | Nom. | Max. |
| A | 18.67 | 19.05 | 19.69 |
| B | 6.10 | 6.35 | 7.11 |
| C | 2.92 | 3.30 | 4.95 |
| D | 2.92 | 3.30 | 3.81 |
| E | 0.36 | 0.46 | 0.56 |
| F | 1.14 | 1.52 | 1.78 |
| G | — | 2.54 BSC | — |
| H | 7.62 | 7.87 | 8.26 |
| I | — | — | 10.92 |

8-pin SOP (150mil) Outline Dimensions

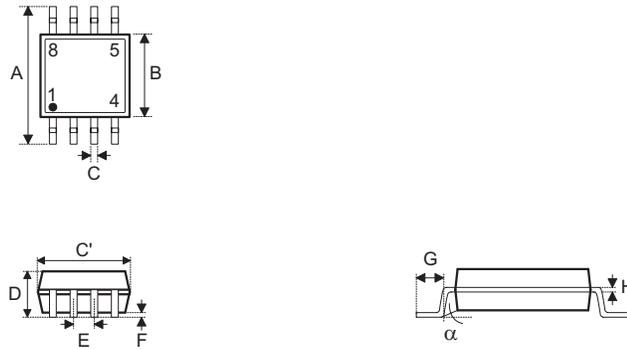

| Symbol | Dimensions in inch | | |
|----------|--------------------|-----------|-------|
| | Min. | Nom. | Max. |
| A | — | 0.236 BSC | — |
| B | — | 0.154 BSC | — |
| C | 0.012 | — | 0.020 |
| C' | — | 0.193 BSC | — |
| D | — | — | 0.069 |
| E | — | 0.050 BSC | — |
| F | 0.004 | — | 0.010 |
| G | 0.016 | — | 0.050 |
| H | 0.004 | — | 0.010 |
| α | 0° | — | 8° |

| Symbol | Dimensions in mm | | |
|----------|------------------|----------|------|
| | Min. | Nom. | Max. |
| A | —F | 6.00 BSC | — |
| B | — | 3.90 BSC | — |
| C | 0.31 | — | 0.51 |
| C' | — | 4.90 BSC | — |
| D | — | — | 1.75 |
| E | — | 1.27 BSC | — |
| F | 0.10 | — | 0.25 |
| G | 0.40 | — | 1.27 |
| H | 0.10 | — | 0.25 |
| α | 0° | — | 8° |

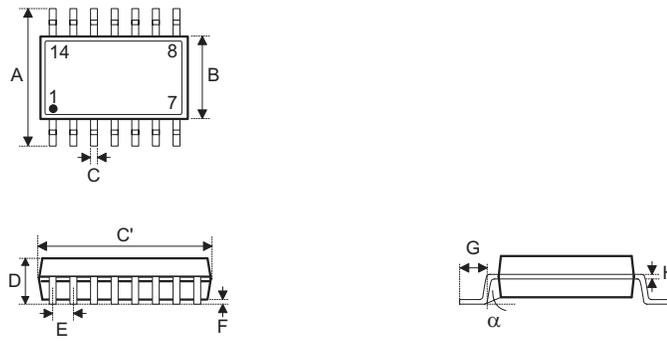14-pin SOP (150mil) Outline Dimensions


| Symbol | Dimensions in inch | | |
|----------|--------------------|-----------|-------|
| | Min. | Nom. | Max. |
| A | — | 0.236 BSC | — |
| B | — | 0.154 BSC | — |
| C | 0.012 | — | 0.020 |
| C' | — | 0.341 BSC | — |
| D | — | — | 0.069 |
| E | — | 0.050 BSC | — |
| F | 0.004 | — | 0.010 |
| G | 0.016 | — | 0.050 |
| H | 0.004 | — | 0.010 |
| α | 0° | — | 8° |

| Symbol | Dimensions in mm | | |
|----------|------------------|----------|------|
| | Min. | Nom. | Max. |
| A | — | 6.00 BSC | — |
| B | — | 3.90 BSC | — |
| C | 0.31 | — | 0.51 |
| C' | — | 8.65 BSC | — |
| D | — | — | 1.75 |
| E | — | 1.27 BSC | — |
| F | 0.10 | — | 0.25 |
| G | 0.40 | — | 1.27 |
| H | 0.10 | — | 0.25 |
| α | 0° | — | 8° |

Copyright© 2013 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek's products are not authorized for use as critical components in life support devices or systems. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at <http://www.holtek.com.tw>.