

REV.	DESCRIPTION	DATE
A	RELEASE	Jun 19,2004
B	05'0435	Apr 12,2005
C	06'1233	Dec 29,2006

MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. COVER : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
3. TERMINAL : COPPER ALLOY($t=0.20\text{mm}$), GOLD PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAILS.

SPECIFICATION

1. CURRENT RATING : 1.0 A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : $1000\text{M}\Omega$ MIN.
AT 500V DC.
4. CONTACT RESISTANCE : $30\text{m}\Omega$ MAX.
5. OPERATING TEMPERATURE : -40°C TO $+85^{\circ}\text{C}$.

ORDER INFORMATION:


5190006-XXX-R

SERIES CODE
SMT
FEMALE
NUMBER OF POSITIONS



ROHS
FOLLOW NUMBER
03: TUBE PACKAGE
04: TAPE&REEL PACKAGE
CONTACT PLATING:
0: GOLD FLASH
2: 10μ " GOLD

TOLERANCE $.0=\pm.38$ [.015] $.00=\pm.25$ [.010] $.000=\pm.XXX$ $.0000=\pm.$ $\text{ANG.}=\pm 3^{\circ}$	DRAWER <i>yun</i> CHECK <i>Eric</i>		Astron ASTRON TECHNOLOGY CORP.	
	APP'D <i>Wisely</i> PRODUCT SPEC.		NAME 2.54PH SIM CARD SMT 6PIN W/POST (ROHS)	
UNITS : mm [inch]	SCALE NONE		SIZE A4	SHEET 1 OF 2
REV. C		DRAW NO. R5190006-X03(04)		


RECOMMEND P.C.B. LAYOUT
TOLERANCE ± 0.05
TOP VIEW

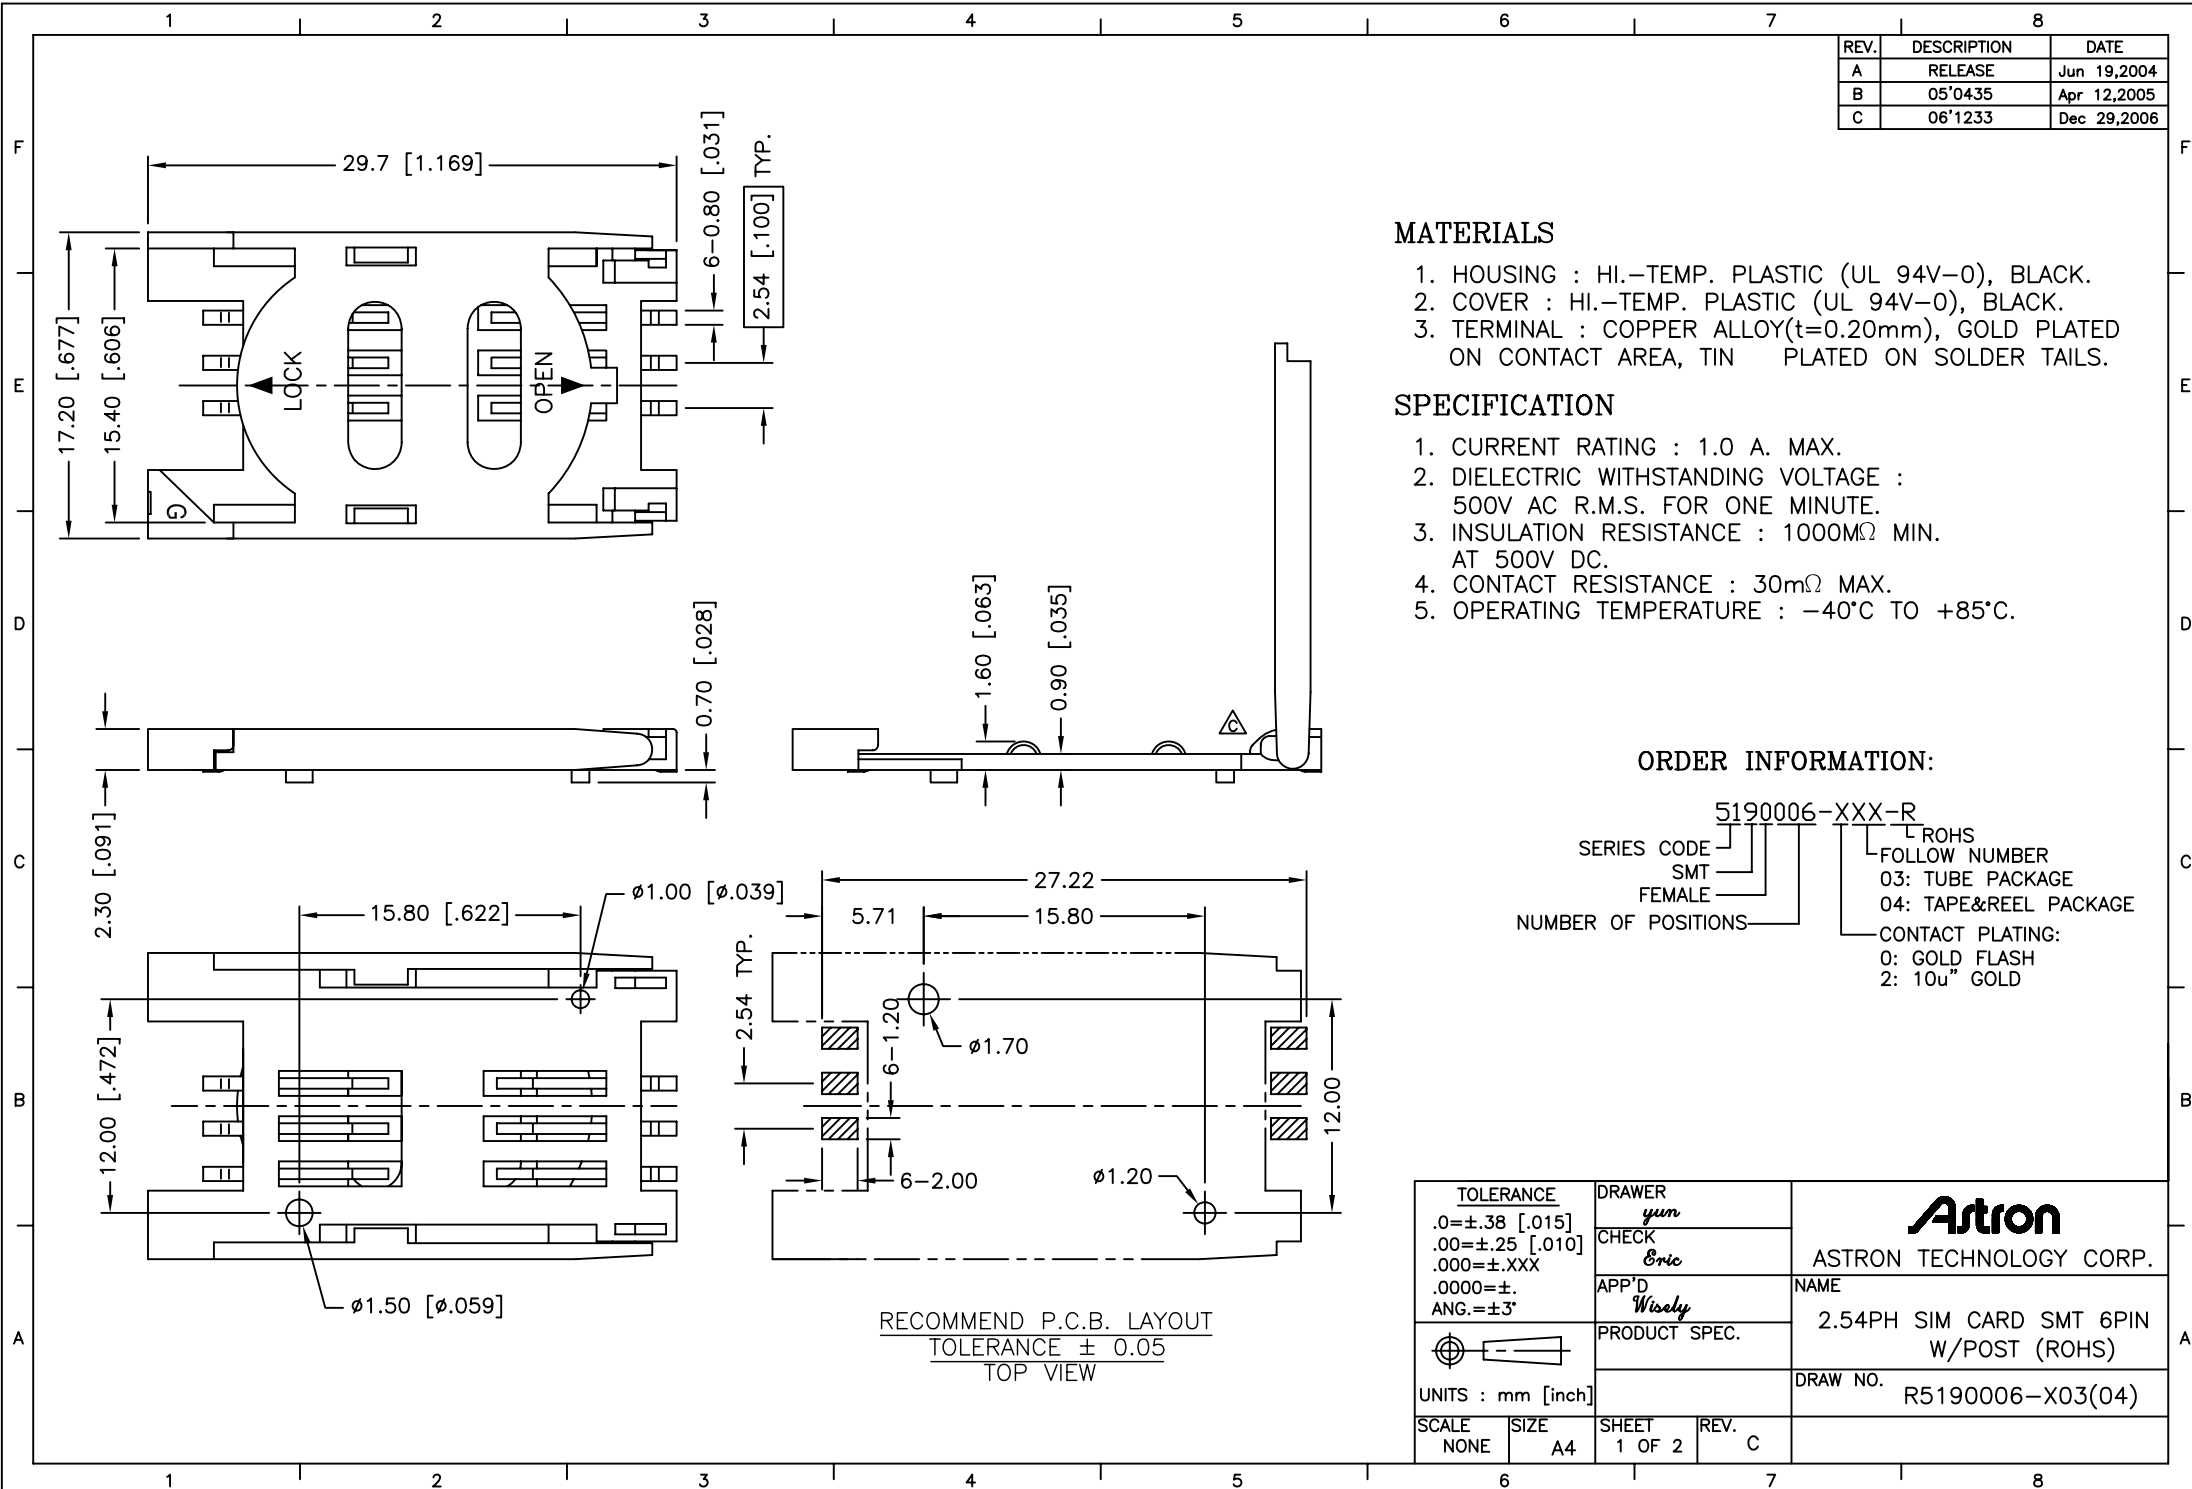

REV.	DESCRIPTION	DATE
A	RELEASE	Jun 19,2004
B	05'0435	Apr 12,2005
C	06'1233	Dec 29,2006

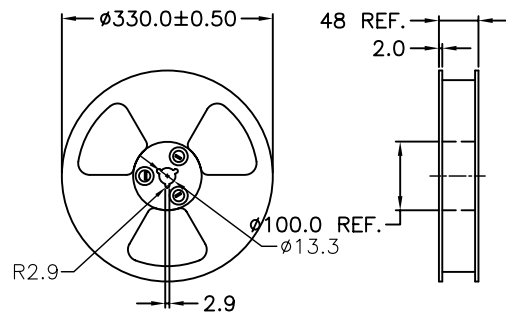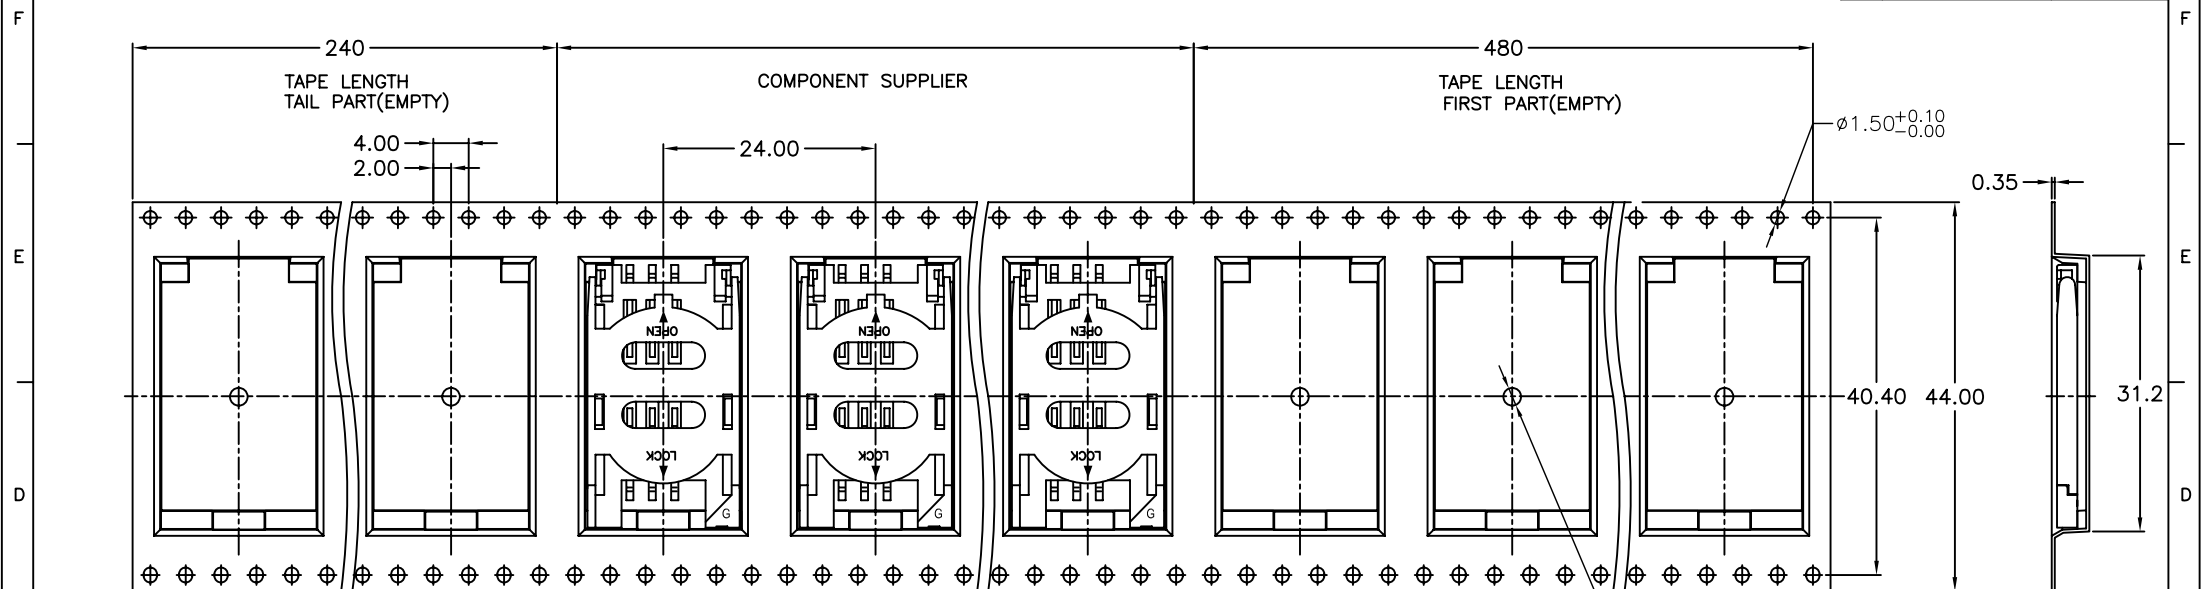

REEL FOR CARRIER TAPE

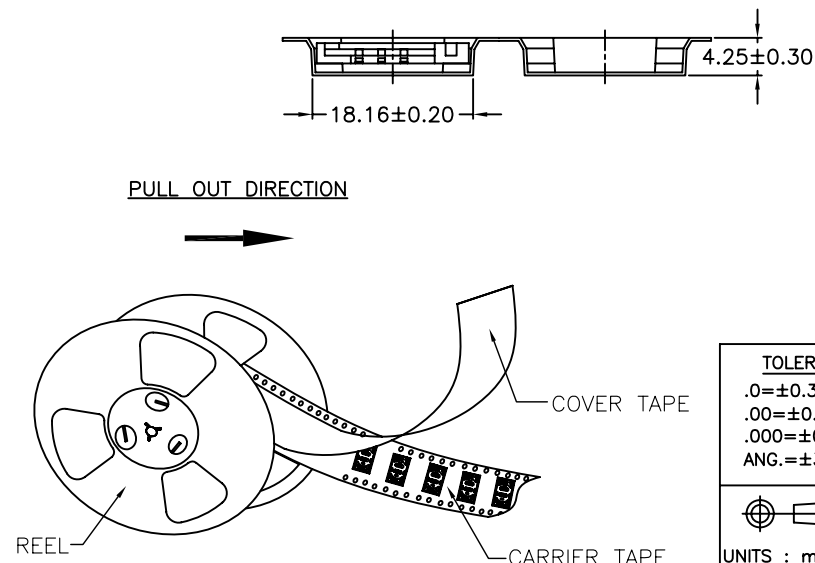

TAPE & REEL PACKAGE :

MATERIALS

1. CARRIER TAPE: POLYSTYREN (PS)
2. COVER TAPE: POLYSTYREN (PS)
3. REEL: POLYSTYREN (PS)

QUANTITY

1. 650PCS PER REEL
2. 6 REEL PER CARTON(3900PCS PER CARTON)

TOLERANCE .0=±0.30 .00=±0.10 .000=±0.05 ANG.=±3°	DRAWER <i>gun</i>	Astron ASTRON TECHNOLOGY CORP.
	CHECK <i>Eric</i>	
 UNITS : mm [inch]	APP'D <i>Wisely</i>	NAME 2.54PH SIM CARD SMT 6PIN W/POSE (ROHS)
	PRODUCT SPEC. —	DRAW NO. R5190006-X03(04)
SCALE NONE	SIZE A4	SHEET 2 OF 2
		REV. C