




SPL (Hong Kong) Limited

Rm 2507, 25/F, Prosperity Centre, 25 Chong Yip St., Kwun Tong, Kln., HK.
Tel: 852-23426867 / 57 Fax: 852-23426847 Email: sales@spl-hk.com.hk
www.buzzer.com.hk ; www.transducer.com.hk ; www.connector.com.hk

Magnetic Buzzer SMB03 series

DIMENSIONS

Date : 31 Dec., 2008

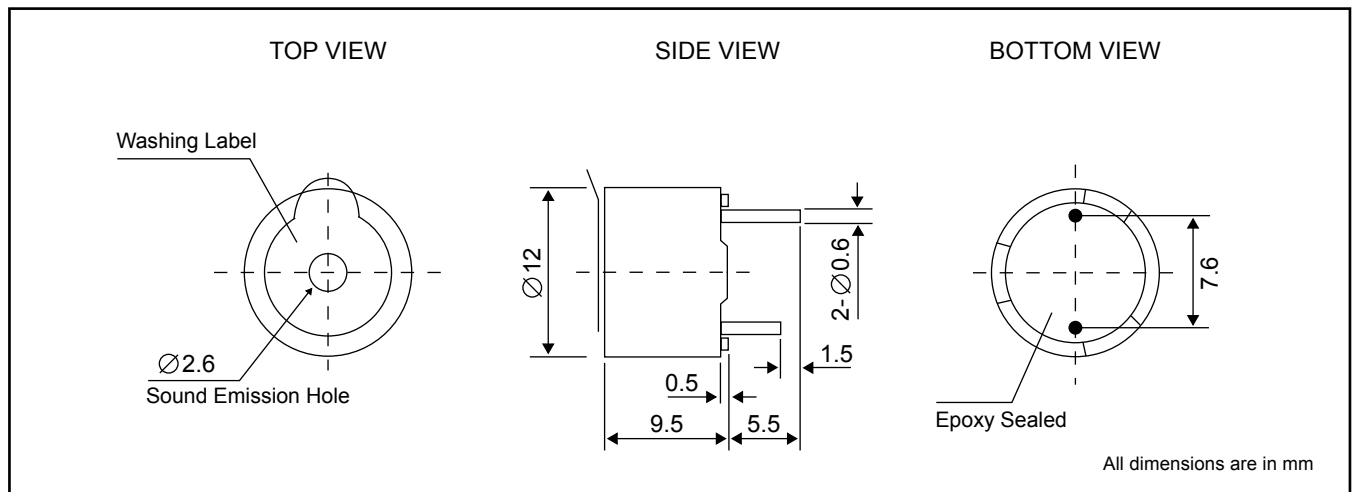

Ref. no. : PC096FL-R



ELECTRICAL SPECIFICATIONS

Model No.	MB03-A12NPR	
Operating Voltage	[VDC]	8 ~ 16
Rated Voltage	[VDC]	12
* Max. Rated Current	[mA]	30
* Min. Sound Output	[dBA /10cm]	85
* Frequency	[Hz]	2400 +/- 300
Tone Nature		Single
Operating Temperature	[°C]	-20 ~ +70
Storage Temperature	[°C]	-30 ~ +80
Terminal		Pin
Housing Material		PPO
Colour		Black
Weight	[gm]	2

*Value applying at rated voltage