



SPL (Hong Kong) Limited

Rm 2507, 25/F, Prosperity Centre, 25 Chong Yip St., Kwun Tong, Kln., HK.
Tel: 852-23426867 / 57 Fax: 852-23426847 Email: sales@spl-hk.com.hk
www.buzzer.com.hk ; www.transducer.com.hk ; www.connector.com.hk


Magnetic Buzzer

SMB03 series

NEW CODE SPECIFICATION

DIMENSIONS

Date : 22 Sept, 2006

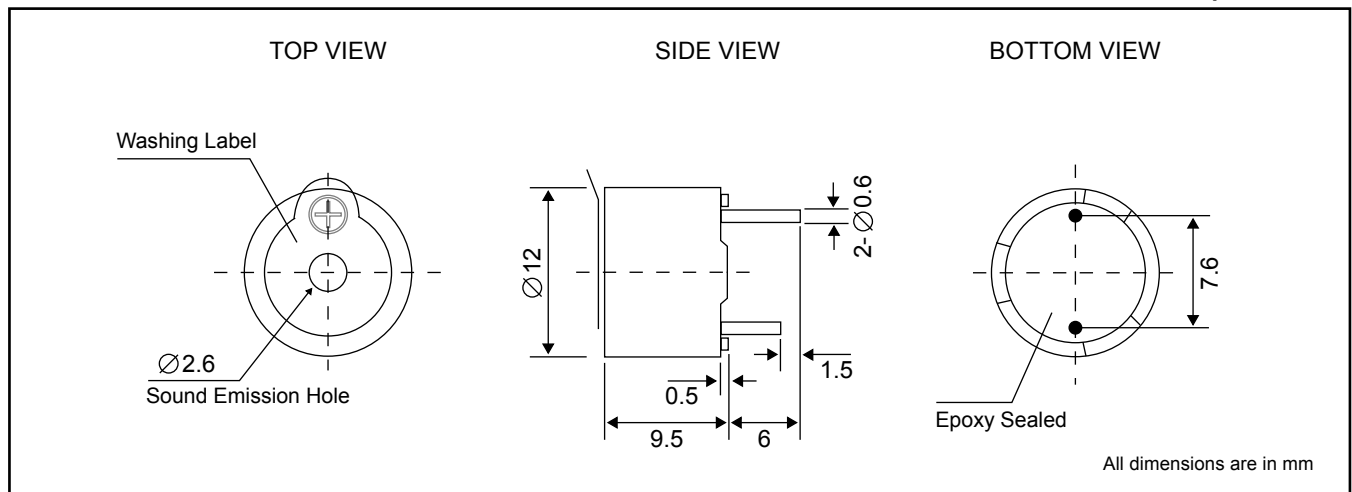

Ref. no. : PC342DX

Remark : Blue label



ELECTRICAL SPECIFICATIONS

Model No.		MB03-A9NPR
Operating Voltage	[VDC]	7 ~ 12
Rated Voltage	[VDC]	9
* Max. Rated Current	[mA]	30
* Min. Sound Output	[dBA /10cm]	85
* Frequency	[Hz]	2300 +/- 300
Tone Nature		Single
Operating Temperature	[°C]	-40 ~ +85
Terminal		Pin
Housing Material		Noryl
Colour		Black
Weight	[gm]	2

*Value applying at rated voltage