


BUZZER TYD-12

1 . Electrical Characteristics

Type	TYD-12
Rated Voltage : DC(V)	12
Operating Voltage DC(V)	10 - 14
Rated Current (mA)	Max30
Sound Pressure Level (dB)	Min85/10cm
Resonant Frequency (Hz)	2300±300
Operating Temperature	-20~ +70 DEGREE
Material	PPO

2.Dimension:Unit(mm)

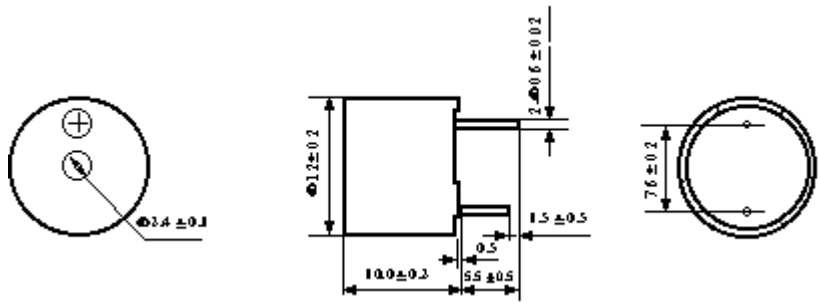


BUZZER TYD-01

1. Electrical Characteristics

Type	TYD-01
Rated Voltage DC(V)	1.5
Operating Voltage DC(V)	1.25 – 2.5
Rated Current (mA)	Max25
Sound Pressure Level (dB)	Min80/10cm
Resonant Frequency (Hz)	2300 ± 300
Operating Temperature	-20~ +70 DEGREE
Material	PPO

2.Dimension:Unit(mm)

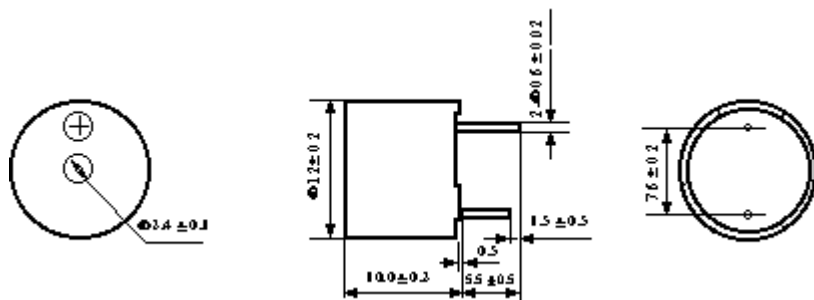


BUZZER TYD-05

1. Electrical Characteristics

Type	TYD-05
Rated Voltage DC(V)	5
Operating Voltage DC(V)	4 – 7
Rated Current (mA)	Max30
Sound Pressure Level (dB)	Min85/10cm
Resonant Frequency (Hz)	2300 ± 300
Operating Temperature	-20~ +70 DEGREE
Material	PPO

2.Dimension:Unit(mm)

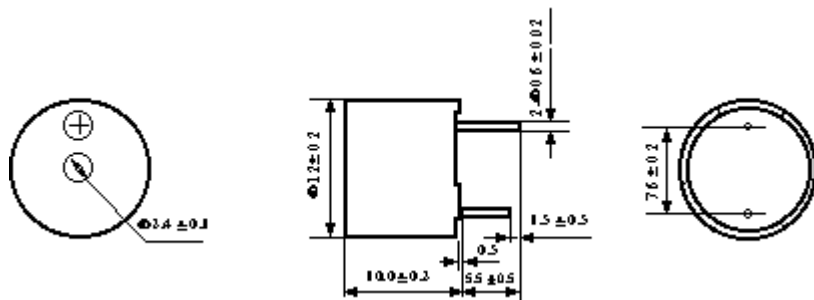


BUZZER TYD-03

1. Electrical Characteristics

Type	TYD-03
Rated Voltage DC(V)	3
Operating Voltage DC(V)	2 – 4
Rated Current (mA)	Max25
Sound Pressure Level (dB)	Min85/10cm
Resonant Frequency (Hz)	2300±300
Operating Temperature	-20~ +70 DEGREE
Material	PPO

2.Dimension:Unit(mm)

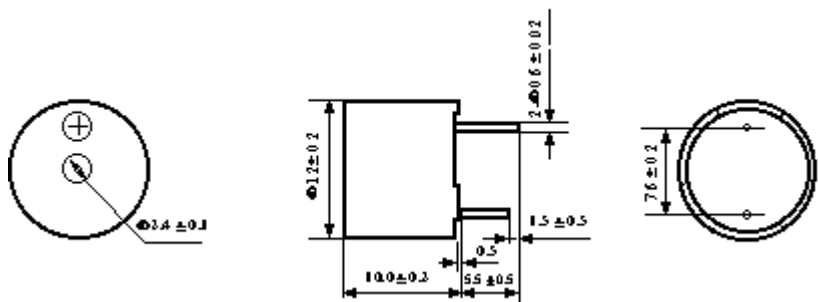

BUZZER TYD-09

1. Electrical Characteristics

Type	TYD-09
Rated Voltage DC(V)	9
Operating Voltage DC(V)	7- 10
Rated Current (mA)	Max30
Sound Pressure Level (dB)	Min85/10cm
Resonant Frequency (Hz)	2300±300
Operating Temperature	-20~ +70 DEGREE
Material	PPO

2.Dimension:Unit(mm)

