





IT-1102W~1102WA




MODEL NO.	STEM (L)
IT-1102W	4.3
IT-1102WA	5.0



Rating : 50mA 12V DC.
Travel : 0.25 ± 0.15 mm.
Contact resistance : 100m Ω Max.
Operating force : 100, 130, 160,
250 $\pm$ 50g.
Life : 100,000 Cycles Min.



CIRCUIT DIAGRAM



IT-1102WB~1102WE




MODEL NO.	STEM (L)
IT-1102WB	7.0
IT-1102WC	8.0
IT-1102WD	9.5
IT-1102WE	7.3 x Ø3.4
IT-1102WF	12.5
IT-1102WG	13.5
IT-1102WH	9.7
IT-1102WI	17.0
IT-1102WJ	16.3
IT-1102WK	13.0
IT-1102WL	21.0
IT-1102WQ	11.0
IT-1102WR	6.0
IT-1102WZ	8.5






IT-1102WF~1102WZ




IT-1102WT




MODEL NO.	STEM (L)
IT-1102WT	7.3 x Ø2.4




P.C.B. LAYOUT




0343



CIRCUIT DIAGRAM



P.C.B. LAYOUT




MODEL NO.	STEM (L)
0343	4.3
0350	5.0

Rating : 50mA 12V DC.
Travel : 0.25 ± 0.1 mm.
Contact resistance : 100m Ω Max.
Operating force : 130, 180, 250 $\pm$ 50g.
Life : 130g, 180g : 50,000 Cycles Min.
250g : 30,000 Cycles Min.




IT-1101V

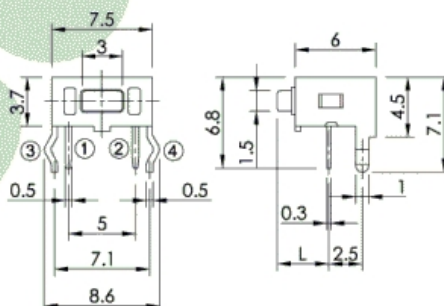

CIRCUIT DIAGRAM



P.C.B. LAYOUT



MODEL NO.	STEM (L)
IT-1101V	3.15
IT-1101VA	3.85

Rating : 50mA 12V DC.
Travel : 0.25 ± 0.1 mm.
Contact resistance : 100m Ω Max.
Operating force : 130, 180 $\pm$ 30g,
250 $\pm$ 50g.
Life : 130g, 180g : 50,000 Cycles Min.
250g : 30,000 Cycles Min.