






Non-shorting





RoHS
Compliance




SCHEMATIC



PCB LAYOUT

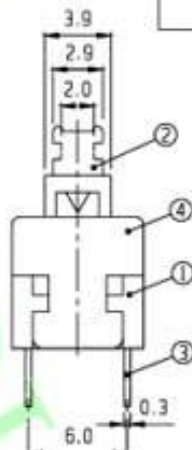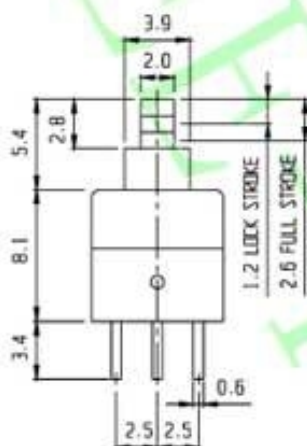

7	HOOK	S U S	1							
5	CONTACT	P B S	2	Ag PLATED	6	SPRING	STEEL WIRE	1		
3	TERMINAL	BRASS	6	Ag PLATED	4	COVER	P O M	1	HW	
1	FRAME	NYLON	1	HB	2	KNOB	P O M	1	HBU	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS	
ISSUED		SPECIFICATION			TITLE: PUSH SLIDE SWITCH (2P2T) (LOCK)					
	RATING: DC 30V 0.1A				MODEL NO: PS-22E08L					
	CONTACT RESISTANCE: 70mΩ max.									
	INSULATION RESISTANCE: 100MΩ at 500V DC				TOLERANCE		UNIT: MM		DWN.	
	WITHSTAND VOLTAGE: AC 250V for 1 minute				UP TO 1.0:±0.1		SCALE: 3:1		CHK'D.	
	OPERATION FORCE: REFER ATTACH SPECIFICATION				1.0 TO 10.0:±0.2		VERSION: 02		APPD.	
SWITCHING LIFE: 10K cycles min.				OVER 10.0:±0.3		DRWG NO:				
BY: 		SEE-PLUS INDUSTRIAL LTD.								
DATE: 18-AUG-2005										