

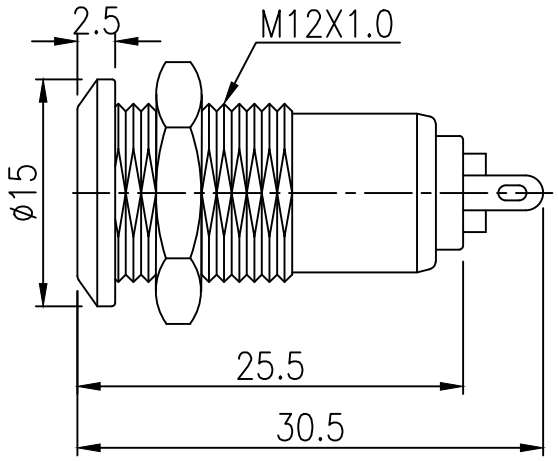

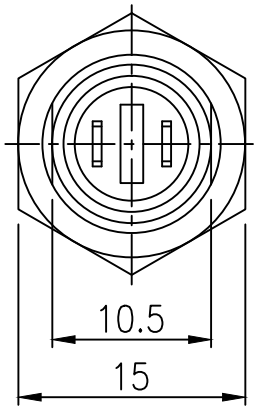

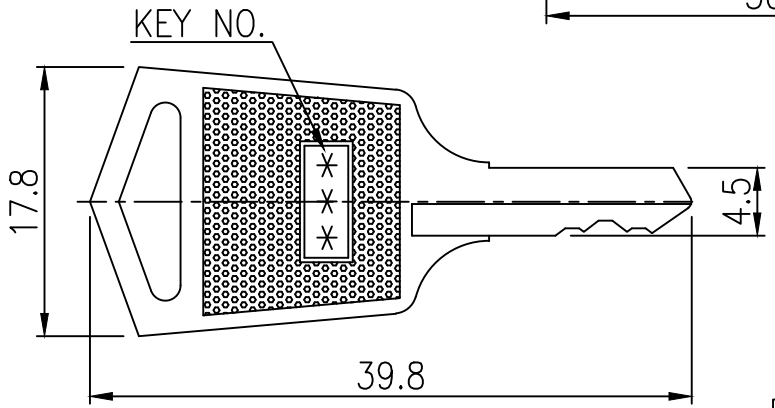



Recommended hole size

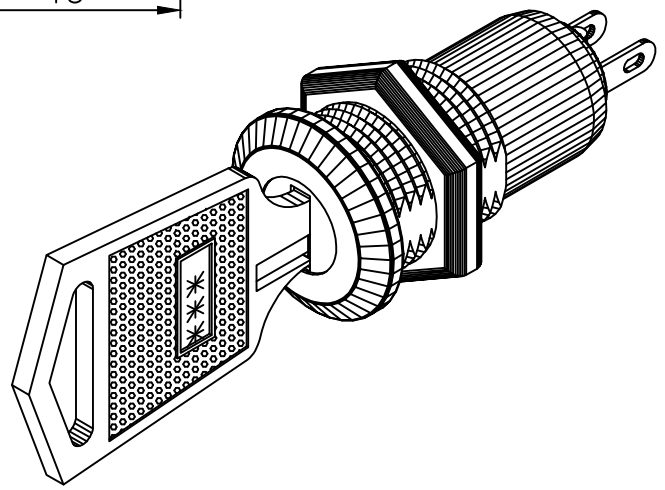

NOTES:
*Zinc alloy die cast housing with bright stainless steel bezel.
*Brass keys,nickel plated.
*Silver plated contacts and terminals.
*2 Positions (off-on).
*Key can withdrawn in both positions.
*Contact Rating : 0.2A 125VAC
*Meet with RoHS.

JIN TAY INDUSTRIES CO., LTD. 05.15.2013 RESEARCH & DEVELOPMENT

DESCRIPTION	KEYLOCK SWITCH				
PART NO.	S1091B-2				
MATERIAL					
NOTE					
APPROVED BY	林志哲	CHECKED BY	李國建	DRAWN BY	陳虹穎
TOLERANCES		UNIT	mm	SCALE	2:1
	JIN TAY INDUSTRIES CO., LTD.				
REV.	A	WT.	g	DATE	05.15.13

REV. NO.	COORDINATES	WAS	NEW	DATE	BY
1					

TOLERANCES: >0 ±0.2; >6 ±0.3; >30 ±0.4; >120 ±0.6; >315 ±1.0; >1000 ±2.5

JT-RD-004-2