


SPECIFICATIONS

1. Rating : 6A 125VAC/3A 250VAC
2. Contact Resistance : 20mΩ Max.
3. Insulation Resistance : 1000MΩ(Min.)
4. Dielectric Strength : AC 1500V 1 minute
5. Circuit : 2P1T ON-OFF (A)
2P2T ON-ON (B)
2P2T ON-OFF-ON (C)
6. Safety Approval : None

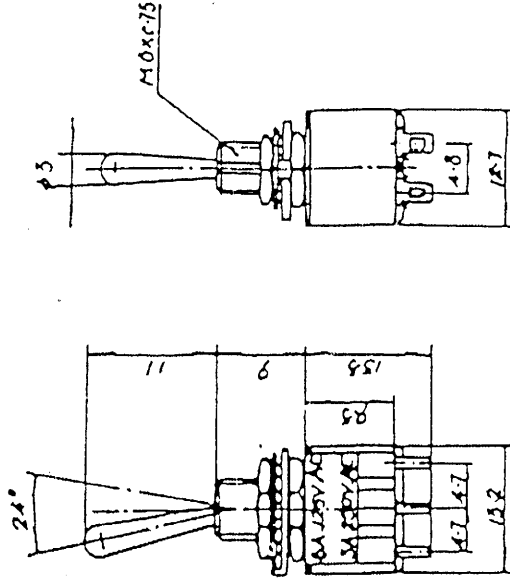

MERCHANT
文件發行章

 Mm[®] MERCHANT CORPORATION LTD.	DIMENSION UNIT		SCALE	TOLERANCE	TITLE	
	MM				TOGGLE SWITCH	
	DRAWN BY 217/5/20	PLANNED BY	NOT SCALE	MATERIAL	MODEL NO	REMARKS A, B, C (火災用分P)
					SG-102	
		CHECKED BY	FINISH NO BUDS	DWG. NO	OT-2000066A	SHEET 1/1



MERCHANT CORPORATION LTD.