




SCHMATIC

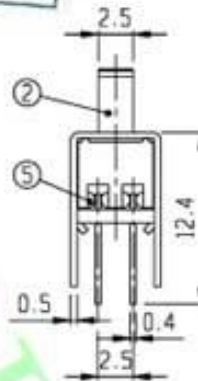

PCB LAYOUT

RoHS
Compliance

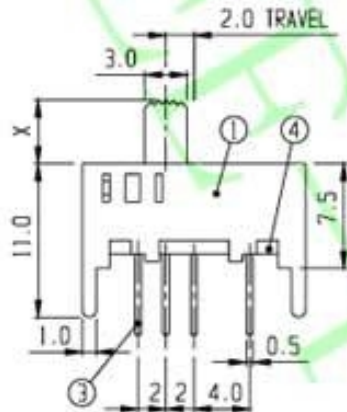

7	BALL	STEEL	1						
5	CONTACT	P B S	2	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	8	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P O M	1	G 2-15
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS
ISSUED		SPECIFICATION			TITLE: SLIDE SWITCH (2P3T)				
	RATING: DC 30V 0.5A				MODEL NO: SS-23D07(G)				
	CONTACT RESISTANCE: 30mΩ max.								
	INSULATION RESISTANCE: 500MΩ at 500V DC				TOLERANCE	UNIT: MM	DWN.	hno	
	WITHSTAND VOLTAGE: AC 500V for 1 minute				UP TO 1.0:±0.1	SCALE: 2.5:1	CHK'D.	m	
	OPERATION FORCE: REFER ATTACH SPECIFICATION				1.0 TO 10.0:±0.2	VERSION: 01	APPD.	hno	
SWITCHING LIFE: 10K cycles min.				OVER 10.0:±0.3	DRWG NO:				
BY:		SEE-PLUS INDUSTRIAL LTD.							
DATE: 10-JUN-1999									