


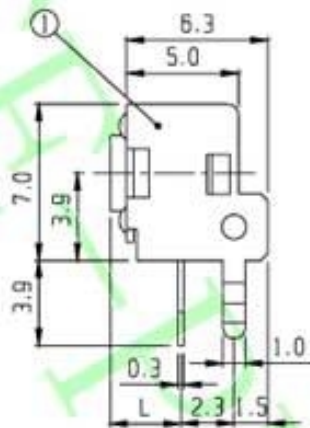
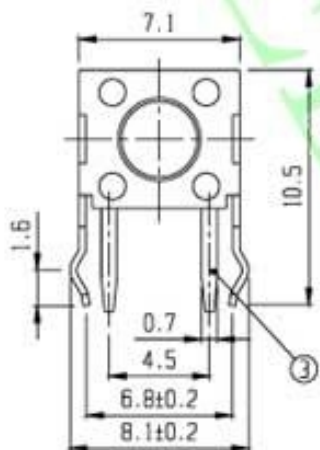




RoHS
Compliance



SCHEMATIC



PCB LAYOUT

MODEL NO.	H	Knob(L)
TC-00100-01	4.30	3.15
TC-00100(A)-01	5.00	3.85
TC-00100(B)-01	7.30	6.15
TC-00100(C)-01	9.50	8.35
TC-00100(D)-01	13.00	11.85
TC-00100(E)-01	7.00	5.85
TC-00100(F)-01	8.00	6.85
TC-00100(G)-01	12.50	11.35
TC-00100(H)-01	13.50	12.35
TC-00100(L)-01	6.00	4.85

5	CONTACT	P B S	1	Ag PLATED					
3	TERMINAL	BRASS	2	Ag PLATED	4	FRAME	NYLON	1	
1	SHELF	S U S	1	Sn PLATED	2	KNOB	NYLON	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: TACT SWITCH					
	RATING: DC 12V 50mA	MODEL NO: TC-00100 ()-01					
	CONTACT RESISTANCE: 100mΩ Max.						
	INSULATION RESISTANCE: 100MΩ at 500V DC	TOLERANCE	UNIT: MM	DWN.			
	WITHSTAND VOLTAGE: AC 250V for 1 minute.	UP TO 1.0:±0.1	SCALE: 4:1	CHK'D.			
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 03	APPD.			
	SWITCHING LIFE: 100k Cycles Min.	OVER 10.0:±0.3	DRWG NO:				
BY: 	SEE-PLUS INDUSTRIAL LTD.						
DATE: 07-NOV-2006							