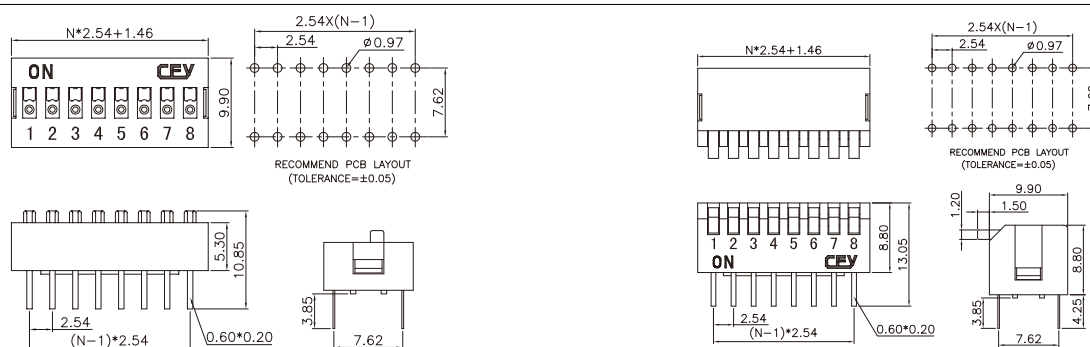


DIP SWITCH


ULO-DS428
PITCH: 2.54mm


Specification

Contact Resistance:	50mΩ Max.At Initial; 100mΩ Max.After Life
Switching Rating:	25mA,24 VDC
Operating Life:	2000 Operations Cycles Per Switch
Dielectric Strength:	500VAC/1 Minute
Insulation Resistance:	1000MΩ Min.500VDC
Non-Switching Rating:	100mA,50 VDC
Circuit:	Single Pole Single Throw
Material	
Base:	Engineering Plastics,Black
Cover:	Engineering Plastics,Red or Blue
Button:	Engineering Plastics,White
Terminal:	Alloy Copper ,Gold Plating

HOW TO ORDER

ULO-DS428

