
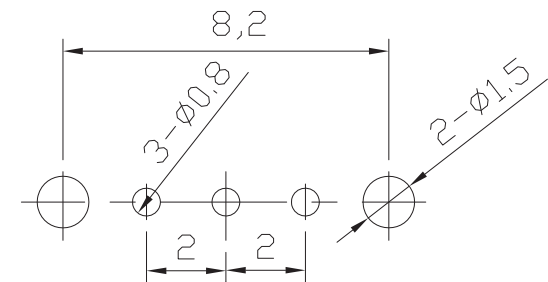
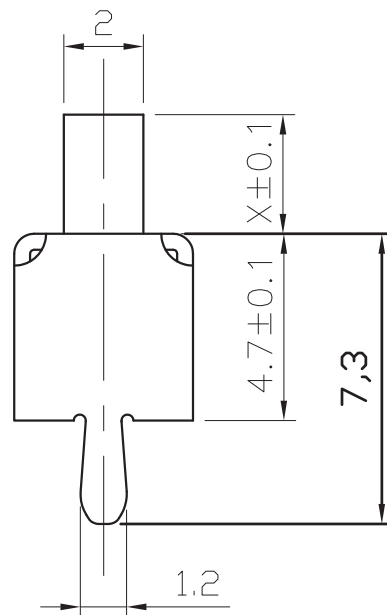




REVISIONS				
LTR	DESCRIPTION	DATE	REVISED	APPROVED

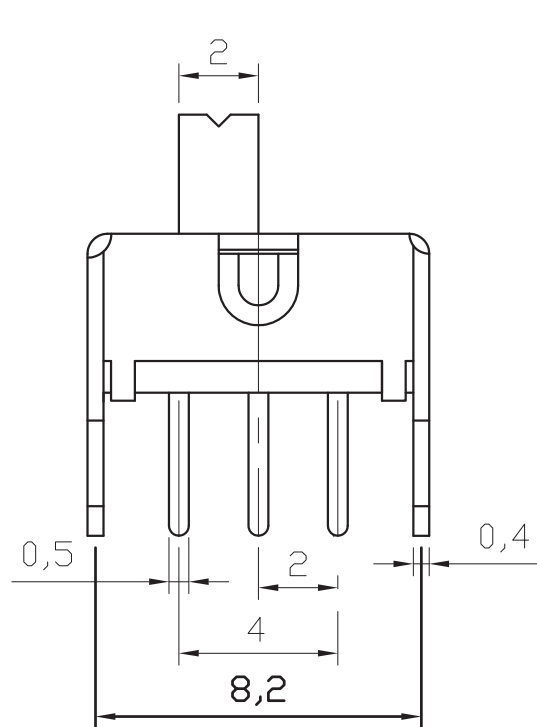

RECOMMEND P.C.B. LAYOUT(t=1.6mm)
TOP VIEW (TOLERANCE:±0.05)

Specification:

- 1.Rating : DC 30V 0.5A
- 2.1.Contact resistance: $\leq 100\text{m}\Omega$
- 3.Insulation resistance: $\geq 100\text{M}\Omega$ (100VDC)
- 4.Withstand voltage: 250VAC/1Min
- 5.Operating force: 200Kgf
- 6.life test: 10000cycles min
- 7.Travel: $2.0 \pm 0.1\text{mm}$
- 8.Operation temperature range: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$

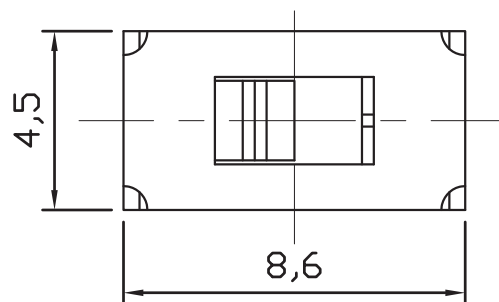

7	COMPRESSION LEG	1	POM	_____
6	SPRINGER	1	CARBON STEEL WIRE	_____
5	SRING	1	BRASS	MB: Ag PLATED
4	TERMINAL	3	BRASS	MB: Ag PLATED
3	PUSH KNOB	1	POM	MB: Cu Cu/Sn PLATED
2	HOUSING	1	PA66	_____
1	SEALED PLATE	1	SPCC	MB: Cu/Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

GENERAL TOLERANCES (UNLESS SPECIFIED)	DRA	Fang Xu	DATE	2014.11.22		NAME	PULL SWITCH
	CHK	Dong Li	DATE	2014.11.22			
.X ±0.4 X° ±3°	APR	Shanghai Chen	DATE	2014.11.22		CAT. NO.	ULO-SS12D07
.XX ±0.3 X° ±2°	SIZE. A4	REV. A	SHEET.1/1	SCALE.10:1		UNIT: mm	
.XXX ±0.1 X° ±1°	NINGBO ULO ELECTRONICS CO., LTD					DWN.NO.	
CUSTOMER							