

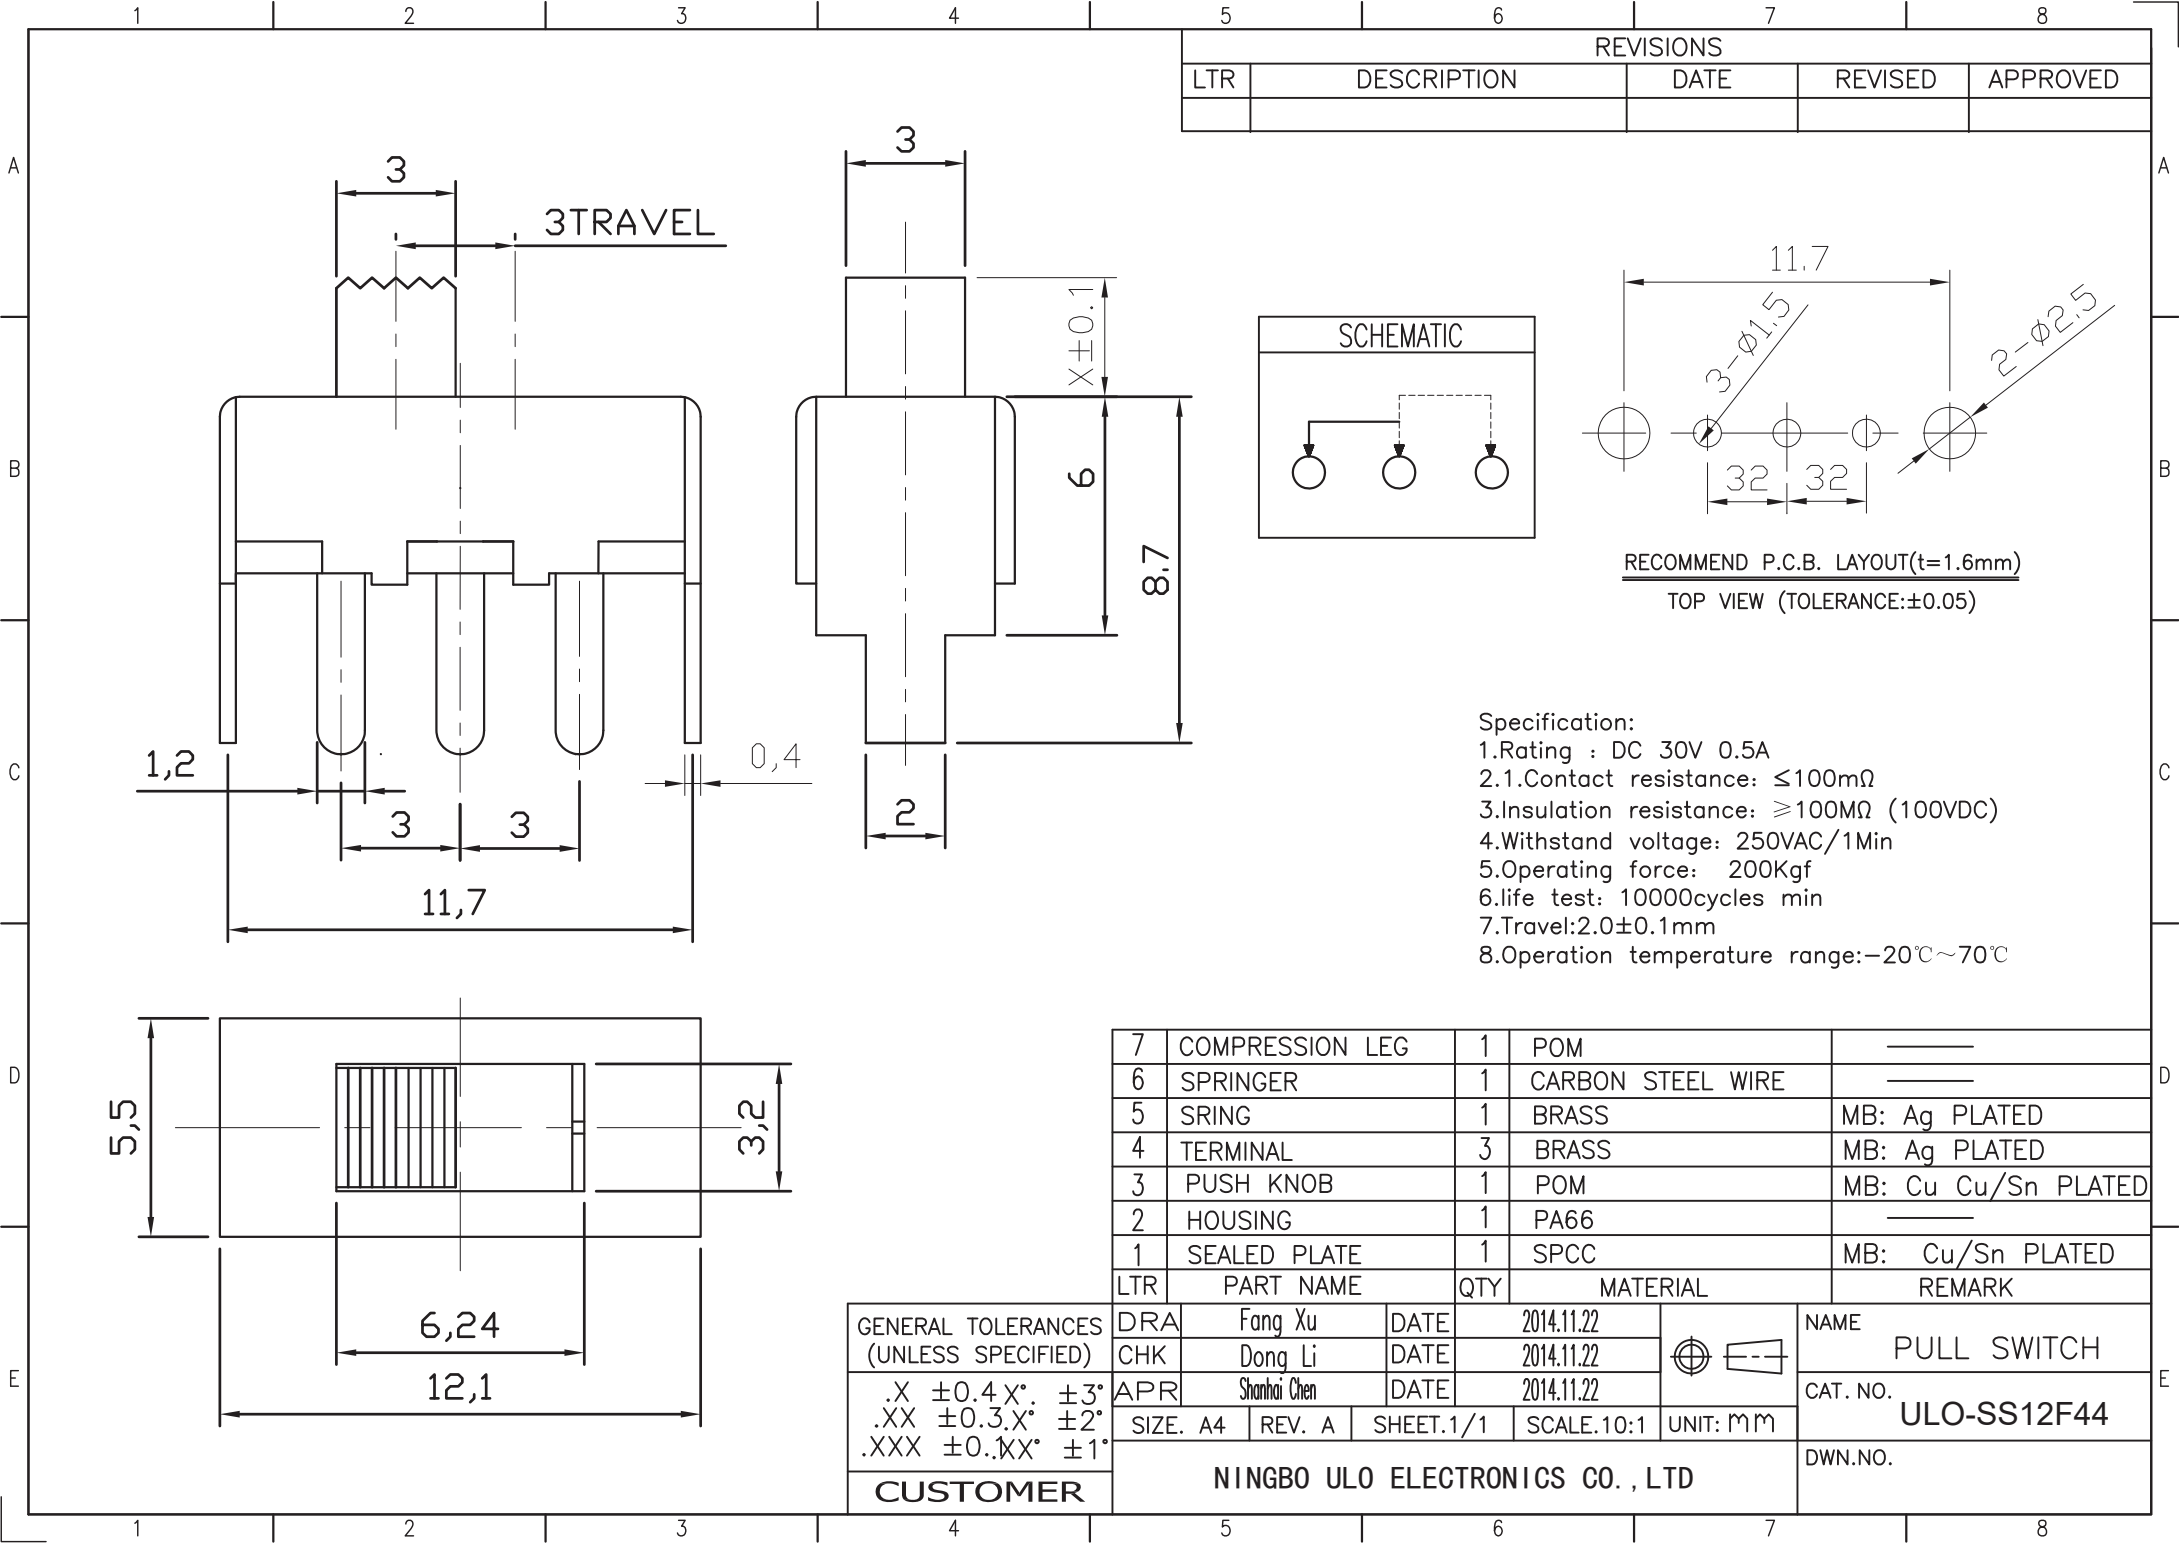


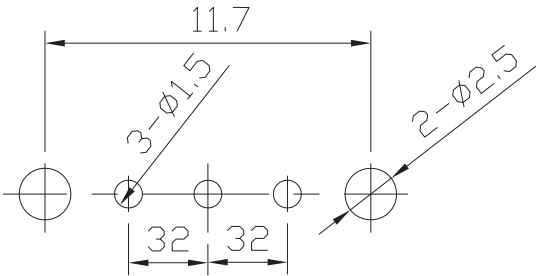

REVISIONS				
LTR	DESCRIPTION	DATE	REVISED	APPROVED



RECOMMEND P.C.B. LAYOUT(t=1.6mm)
TOP VIEW (TOLERANCE:±0.05)

Specification:
1.Rating : DC 30V 0.5A
2.1.Contact resistance: ≤100mΩ
3.Insulation resistance: ≥100MΩ (100VDC)
4.Withstand voltage: 250VAC/1Min
5.Operating force: 200Kgf
6.life test: 10000cycles min
7.Travel:2.0±0.1mm
8.Operation temperature range:−20℃~70℃

7	COMPRESSION LEG	1	POM	
6	SPRINGER	1	CARBON STEEL WIRE	
5	SRING	1	BRASS	MB: Ag PLATED
4	TERMINAL	3	BRASS	MB: Ag PLATED
3	PUSH KNOB	1	POM	MB: Cu Cu/Sn PLATED
2	HOUSING	1	PA66	
1	SEALED PLATE	1	SPCC	MB: Cu/Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

GENERAL TOLERANCES (UNLESS SPECIFIED)
.X ±0.4X° ±3°
.XX ±0.3X° ±2°
.XXX ±0.XX° ±1°
CUSTOMER

DRA	Fang Xu	DATE	2014.11.22
CHK	Dong Li	DATE	2014.11.22
APR	Shanghai Chen	DATE	2014.11.22
SIZE. A4	REV. A	SHEET.1/1	SCALE.10:1
UNIT: mm			
NINGBO ULO ELECTRONICS CO., LTD			

NAME	PULL SWITCH
CAT. NO.	ULO-SS12F44
DWN.NO.	