

ULO-SS428A

Basic information

Product ID	ULO-SS428A
------------	------------

Contact impedance	100mΩ Max
-------------------	-----------

Insulation impedance	1000MΩ Min
----------------------	------------

Withstand voltage	250V AC 1 Minute
-------------------	------------------

Service life	2000 Cycl e Min
--------------	-----------------

Storage temperature	-45°C~+110°C
---------------------	--------------

Material Data

Insulation material	Thermoplastics
---------------------	----------------


Insulation material group	I
---------------------------	---

Flame retardant grade, UL94 compliance	UL94V-0
--	---------


Contact material	Copper alloy
------------------	--------------

HOW TO ORDER


ULO-MDS428A

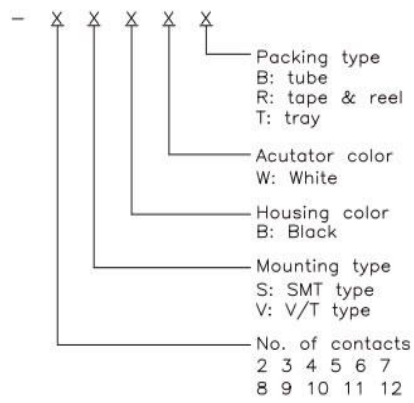



N=Number of contacts



SMT TYPE




V/T TYPE

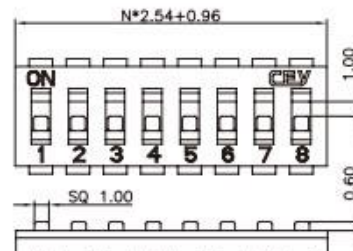

SMT TYPE

RECOMMEND P.C.B LAYOUT
Tolerance±0.05



V/T TYPE