



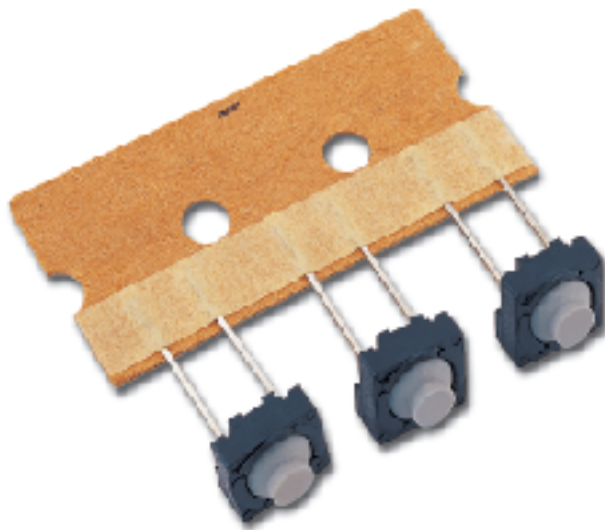

• TR-081

■ RATING: 5mA 12VDC


■ DIMENSIONS (Unless otherwise specified, a tolerance of $\pm 0.4\text{mm}$ applies to all dimensions.)

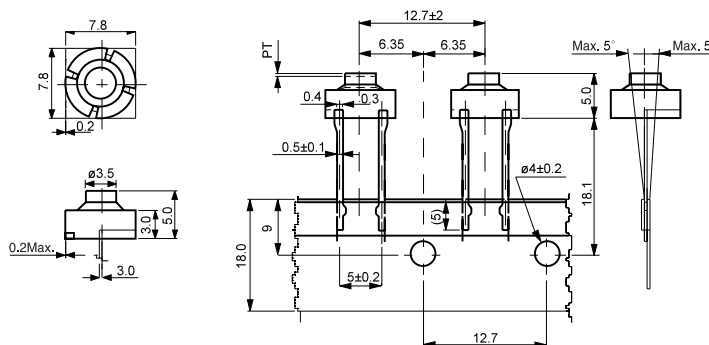


■ SPECIFICATIONS

- Insulation resistance: (at 100VDC) 100 M Ω Min.
- Storage temperature: -25°C to +85°C
- Storage humidity: 85% RH Max.
- Contact arrangement: 1 Pole, 1 Throw
- Operating force: 80 $\pm$ 40g
- Return force: 10g Min.
- Travel: 1 $\pm$ 0.3mm
- Type of actuation: tactile feedback
- Contact resistance: (initial) 500 Ω Max.
- Service life:
(at rated load) 500,000 operations Min.

■ MOUNTING HOLES



■ CONTACT CONFIGURATION



■ TAPE PACKAGING OF 800 PIECES

