


UNA Series

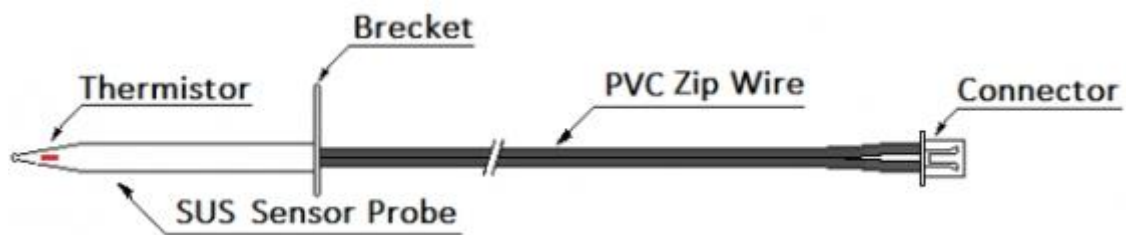

Details

FEATURES

- High stability and best price.
- The **UNA** Series is a thermistor sensor in a DO 35 package. It is highly reliable and offer a wide operating range of -50°C to 250°C .
- They can be employed for home electric appliances and high temperature applications.
- Excellent thermal cycle endurance.
- Glass sealed body for high reliability.

SPECIFICATIONS

Temperature rating		-40℃ to 250℃		B value : 3470K ~4200K	
Determined by rated zero-power					
R25		B25/85		Resistance at 25℃and 85℃	
Rated zero-power		3 K ohms 5 K ohms 10 K ohms 47 K ohms 50 K ohms 100 K ohms 150 K ohms 200 K ohms		Tolerance ±1% ±3% ±5 %	
Resistance value at 25℃				Dissipation constant Min. 2.4mW/℃	
				Thermal time constant Max 15 seconds in still air.	
				Maximum power Rating 250mw at 25℃	
Tolerance		±1% ±3% ±5%			

Order Map	UNA	-	103	<div></div>	-	<div></div> <div></div>	<div></div> <div></div> <div></div>	-	<div></div> <div></div> <div></div> <div></div>
	Series Code	Res. value	Res. tolerance	Leads Gauge	Lengths	B value			
	Temperature Sensor	at 25℃ 10 x 3 Ω	F : 1% H : 3% J : 5%	AWG Number	Exp : 400: 400 mm	25℃/85℃			

