



SPL (HONG KONG) LIMITED


香港九龍觀塘鴻圖道57號南洋廣場17樓1703B室
Room 1703B, 17/F., Nanyang Plaza, No.57 Hung To Road, Kwun Tong, Kowloon, HK.
Tel: 852-2342 6857 / 2342 6867 Fax: 852-2342 6847 Email: sales@spl-hk.com.hk
Website: www.buzzer.com.hk

Piezo Buzzer

SPB04 series

DIMENSIONS

Date : 23 Aug., 2023

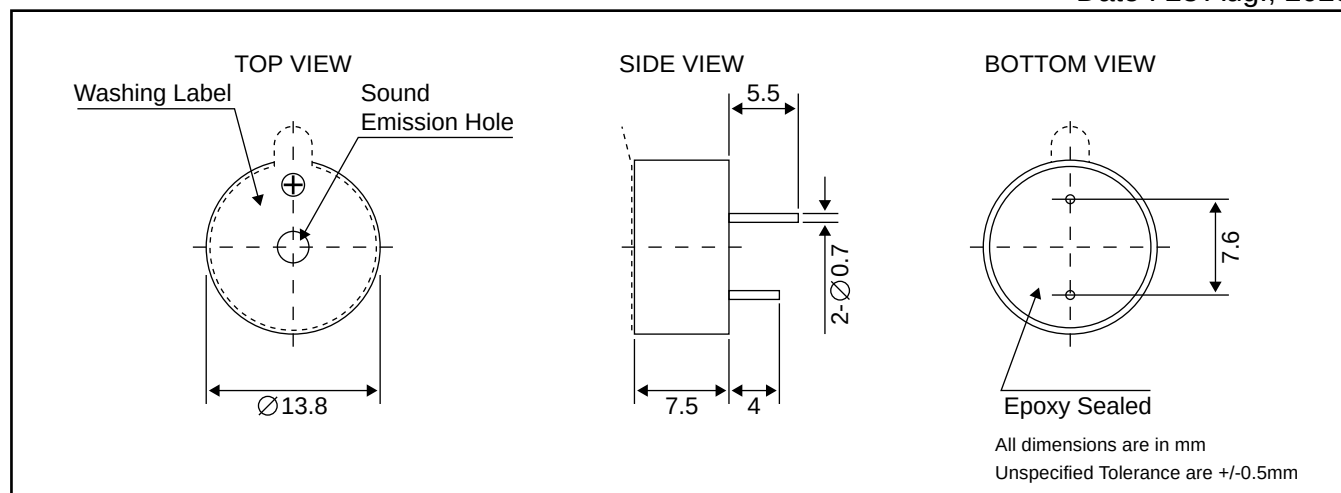

Ref No. : P1181432-5R2



ELECTRICAL SPECIFICATIONS

Model No.		PB04-SE12HPR
Operating Voltage	[VDC]	3.5 ~ 16
Rated Voltage	[VDC]	12
* Max. Rated Current	[mA]	10
* Min. Sound Output	[dBA / 10cm]	88
* Frequency	[Hz]	4000 +/- 500
Tone Nature		Single
Heat Test		Must Be Normal [85 +/- 2 °C, 24 Hours]
Cold Test		Must Be Normal [-40 +/- 2 °C, 24 Hours]
Humidity Test		40 +/- 2 °C, 90 ~ 95% R.H. 24 Hours
Operating Temperature	[°C]	-30 ~ +70 [without label]
Storage Temperature	[°C]	-40 ~ +85 [without label]
Terminal		Pin
Housing Material		PBT
Colour		Black
Weight	[gm]	1 +/- 8%

*Value applying at rated voltage